


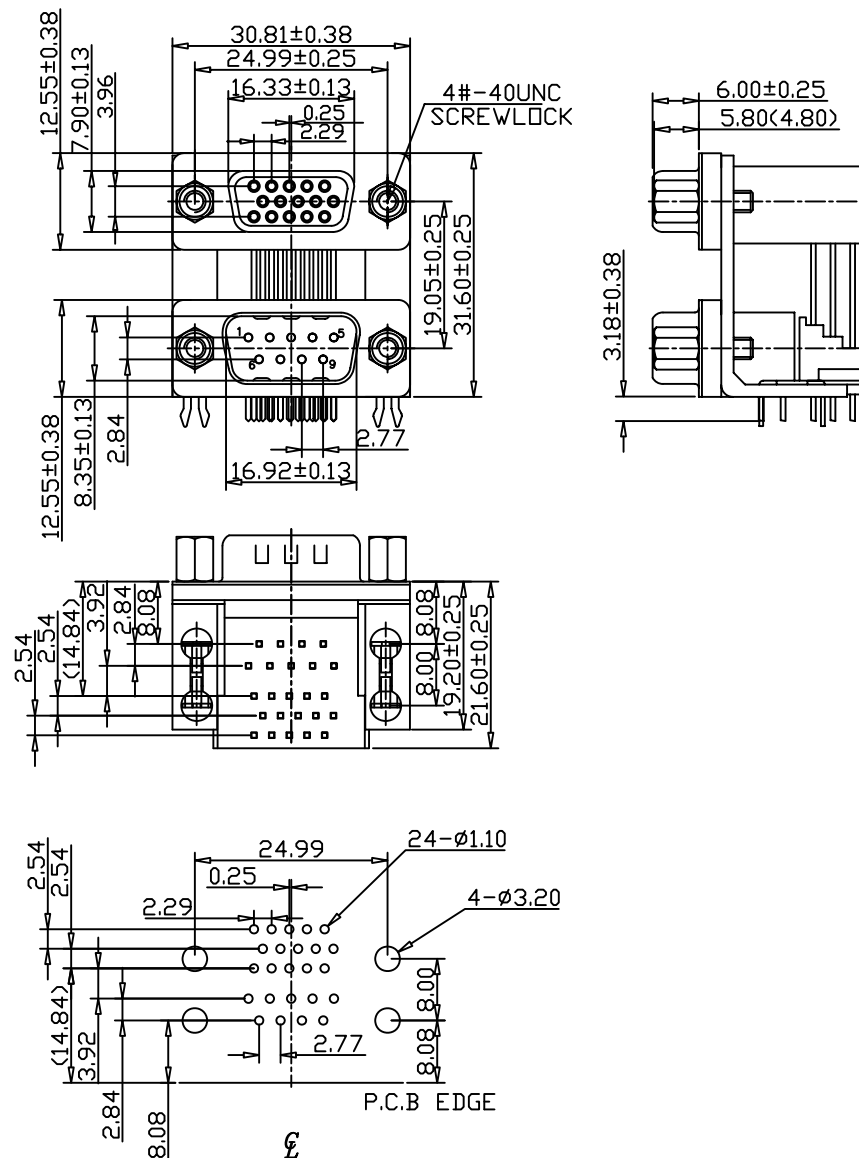

RECOMMENDED P.C.B LAYOUT

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:

Contact Current Rating:3 Amperes.
Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.
Insulation Resistance:5000 Medohms Minimum.at DC 500V.
Contact Resistaance:25 Milliohms Maximum.
Operating Temperature:-55°C to+105°C.

MECHANICAL CHARACTERISTICS:

Contact Insertion Force:341 g.Maximum.
Contact Seperation Force:21 g.Maximum.

MATERIALS:

Contacts:Bass.
Insulator: PBT UL 94V-0 Rated.
Shell:Cold Roller Steel.

FINISHES:

Contact:Gold Flash.

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

DRB1-AN19J-3509-LF

SERIES
LEADFREE
15 TO 09 WAY
JACKSCRW
SPACING 19.05mm
NUT
FEMALE TO MALE

DESCRIPTION: D-SUB 0.318"(8.08mm) FOOTPRINT 15 FEMALE HIGH DENSITY CONNECTOR /09 MALE CONNECTOR, DUAL PORT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±