
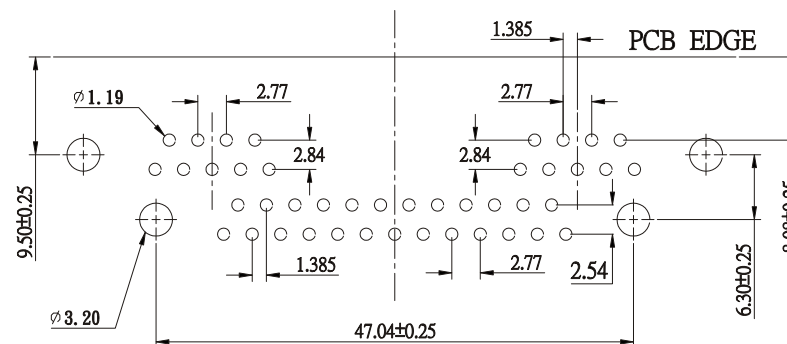


## MATERIAL:

INSULATOR : PBT+30% GLASS FIBER (UL 94V-0) .  
 CONTACT MATERIAL : BRASS.  
 CONTACT FINISH : GOLD FLASH ON MATING END, TIN-LEAD ON RETINATION END, WITH ENTIRE CONTACT NICKEL UNDERPLATED.  
 SHELL FINISH : STEEL NICKEL PLATED.

## SPECIFICATION:

CURRENT RATING : 5 AMP  
 DIELECTRIC WITHSTANDING VOLTAGE : 1000V PER MINUTE.  
 INSULATION RESISTANCE : 1000MΩ MIN. AT 500V DC.  
 CONTACT RESISTANCE : 15mΩ MAX. 10 SEC.  
 OPERATING TEMPERATURE : -55°C ~ +105°C.

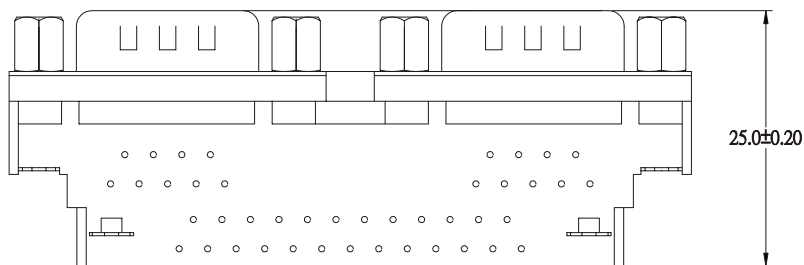

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X. ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±

照片框

### ORDER INFORMATION

DRB1-AN19J4-2599-LF

SERIES | | | | LEADFREE  
 25 TO 09/09 WAY  
 TYPE 4  
 JACKSCRW  
 SPACING 19.05mm  
 NUT

FEMALE TO MALE

DESCRIPTION: D-SUB DUAL PORT 25S/9P\*2