



1 2 3 4 5 6 7 8 9 0

J  
I  
H  
G  
F  
E  
D  
C  
B  
A

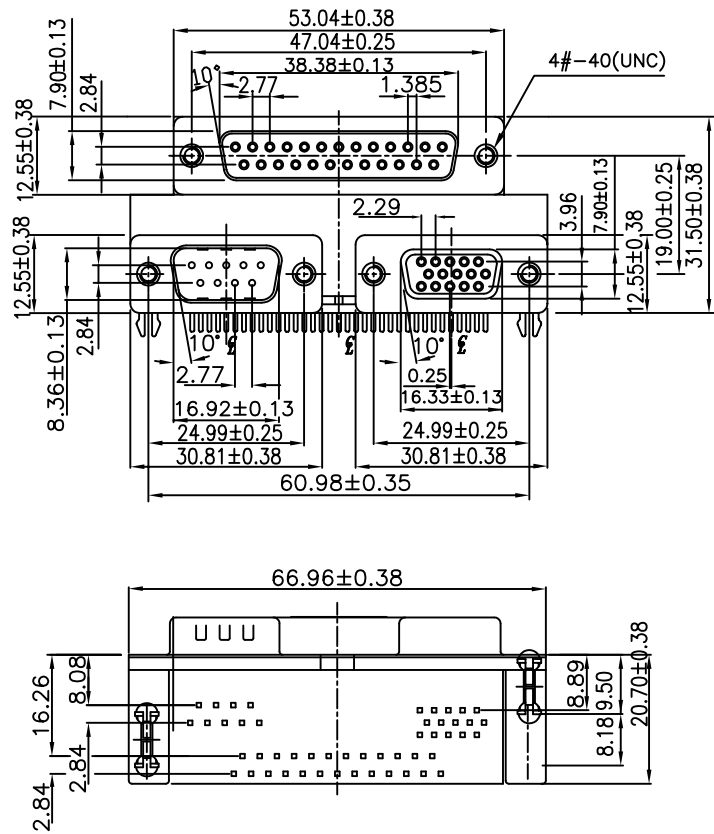

**SPECIFICATIONS**

**ELECTRICAL CHARACTERISTICS:**

Contact Current Rating: 3 Amperes.  
 Dielectric Withstanding Voltage: AC 1000V/60sec. r.m.s.  
 Insulation Resistance: 5000 Megohms Minimum. at DC 500.  
 Contact Resistance: 25 Milliohms Maximum.  
 Operating Temperature: -55°C to +105°C.

**MATERIALS:**


Contacts: Brass.  
 Insulator: PBT UL 94V-0 Rated.  
 Shell: Cold Roller Steel.

**FINISHES:**

Contact: Gold Flash.  
 Shell: Nickel Plated.

**MECHANICAL CHARACTERISTICS:**

Contact Insertion Force: 341 g. Maximum.  
 Contact Separation Force: 21 g. Minimum.

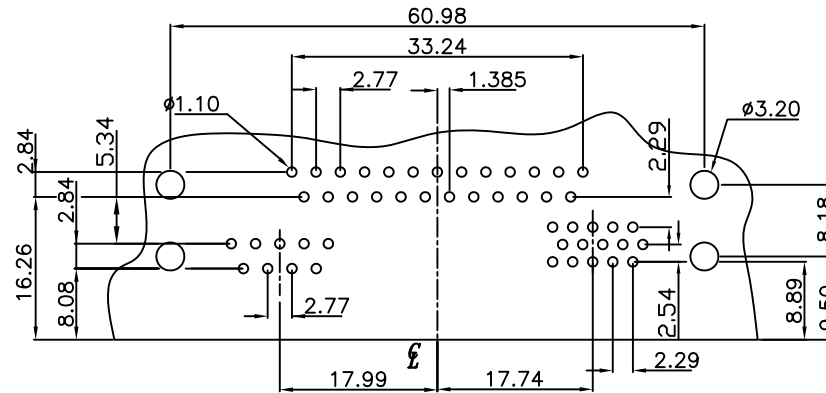

**RECOMMENDED P.C.B. LAYOUT**



煜倫有限公司

PART NO. <b>DRB1-AN8-2593</b>		CHECKED BY CY		TOLERANCES ARE		DESCRIP TION: <b>TRIPLE D-SUB 25 FEMALE LPT1 PORT/ 9 MALE COM PORT AND 15 FEMALE H/D VGA PORT</b>		
DWG NO. <b>DRB1-AN8-2593</b>		DRAWING BY		.X ± .XX ± .XXX ± AWG				
FILE NO.		PROJECTION		AREA	REVISIONS			
UNIT / mm	SCALE 1 : 1							