
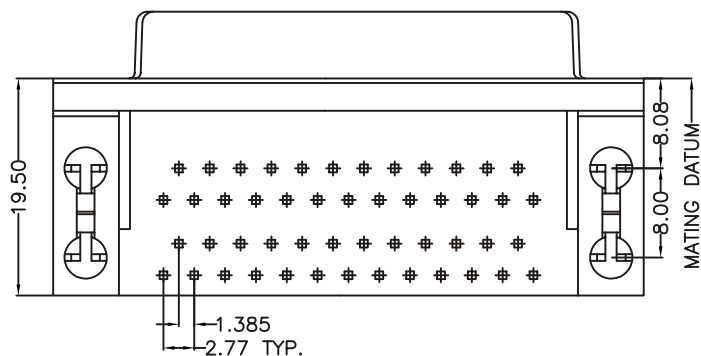
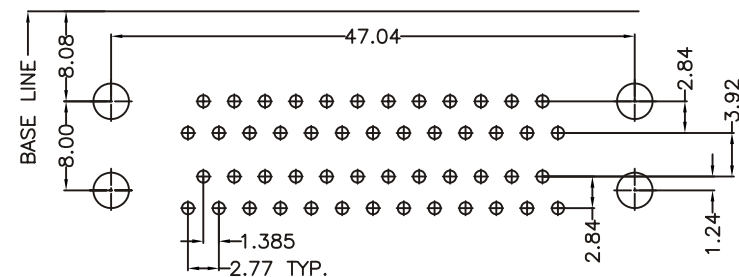
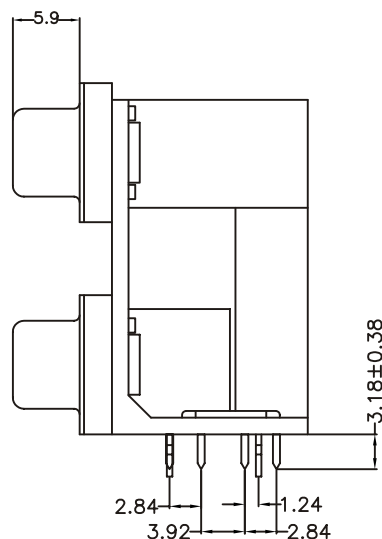


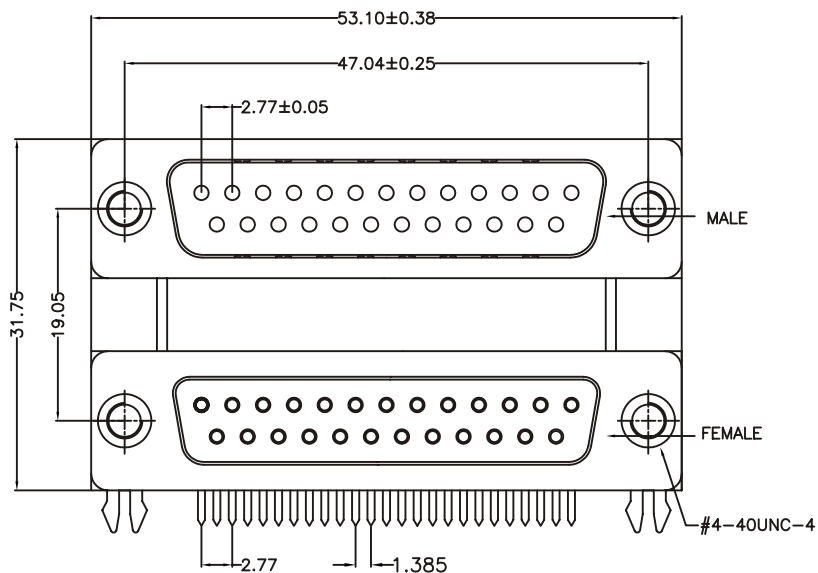

MATERIALS

1.HOUSING : THERMOPLASTIC (UL 94V-0).

2.TERMINAL : COPPER ALLOY.

3.SHELL : STEEL.

SPECIFICATION

1.CURRENT RATING : 5 AMP. MAX.

2.DIELECTRIC WITHSTANDING VOLTAGE :

1000V AC R.M.S. FOR ONE MINUTE.

3.INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.

4.CONTACT RESISTANCE : 30m OHMS MAX.

5.OPERATING TEMPERATURE : -55°C TO $+105^{\circ}\text{C}$.

6.DURABILITY : 500 CYCLES.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

DRB1-EN19-2525-LF

SERIES

LEADFREE

25 MALE TO 25 FEMALE

SPACING 19.05mm

NUT

MALE TO FEMALE

DESCRIPTION: 雙層25公高腳+25母叉鉚半金黑