
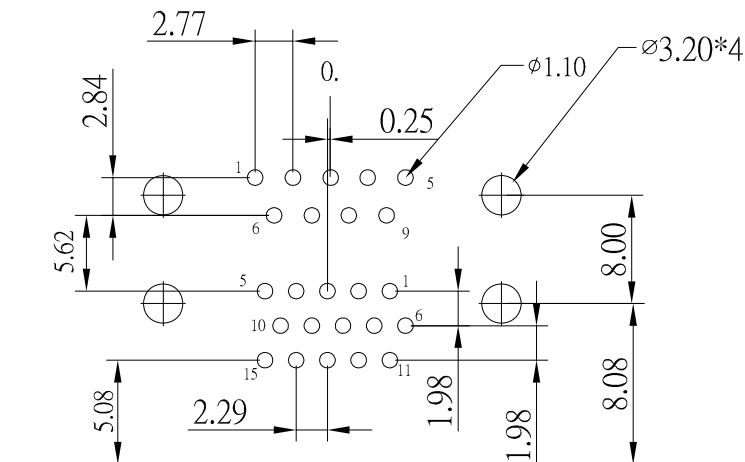


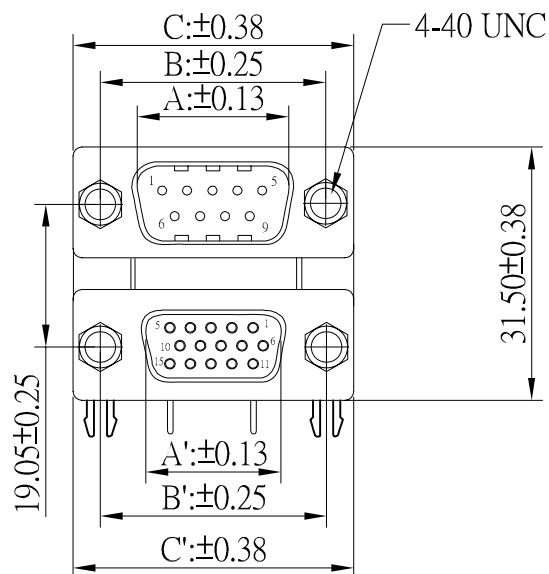

RECOMMENDED P.C.B. LAYOUT

ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 1 Amperes.
Dielectric withstanding: AC 1000V r.m.s.
Insulation Resistance: 5000 Megohms. Minimum.
at DC 500v.
Contact Resistance: 25 Milliohms Maximum.
Operating Temperature: -55° to +105° .

MECHANICAL CHARACTERIATICS:



Contact Isertion Force: 341 g. Maximum.
Contact Separation Force: 21 g . Minimum.

MATERIALS:

Contacts: Brass
Insulator: Polyester, UL 94V-0 Rated.
P.B.T or Nylon 9T
Shell: Cold Roller Steel.

FINISHES:

Contact: Gold Flash.
Shell: Nickel Plated.

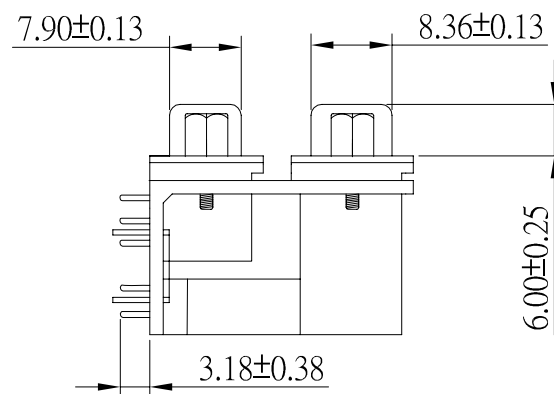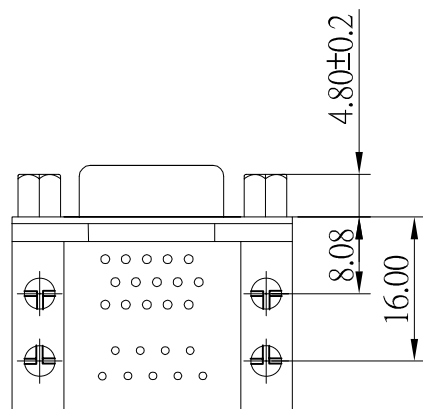

MALE

DIM. CON.	A/A'	B/B'	C/C'
09P	16.92	24.99	30.81

FEMALE

DIM. CON.	A/A'	B/B'	C/C'
HD15S	16.33	24.99	30.81

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.05
ANG ± 3°

照片框

ORDER INFORMATION

DRB1-EN195J-0935-LF

SERIES

LEADFREE
09 TO 15 WAY
JACKSCRW
FOOT FRONT 5.08mm
SPACING 19.05mm
NUT

MALE TO FEMALE

DESCRIPTION: D-SUB RIGHT ANGLE 09/HD15 STACKED CONNECTORS