


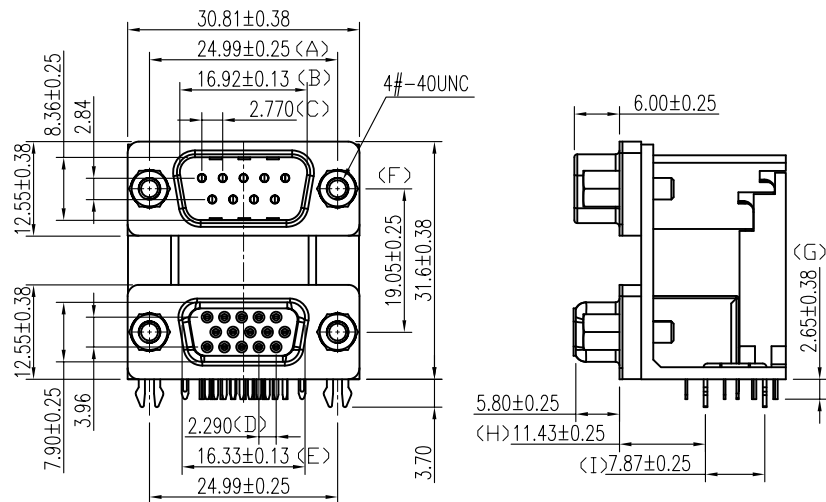

SPECIFICATIONS

1. D-SUB

- 1.1 Voltage: 250 VAC(RMS) Max.
- 1.2 Current Rating: 3 Ampere per Contact
- 1.3 Contact Resistance: 25 Milliohms Max.
- 1.4 Insulation Resistance: 5000 Megohms Min.
- 1.5 Dielectric Withstanding Voltage: 1000V AC(RMS)
- 1.6 Total Mating Force: 4.0 Kgf Max.
- 1.7 Total Unmating Force: 1.0 Kgf Min.
- 1.8 Operating Temperature: -55°C to +85°C

2. VGA

- 2.1 Voltage: 250 VAC(RMS) Max.
- 2.2 Current Rating: 3 Ampere per Contact
- 2.3 Contact Resistance: 25 Milliohms Max.
- 2.4 Insulation Resistance: 5000 Megohms Min.
- 2.5 Dielectric Withstanding Voltage: 1000V AC(RMS)
- 2.6 Total Mating Force: 6.0 Kgf Max.
- 2.7 Total Unmating Force: 1.2 Kgf Min.
- 2.8 Operating Temperature: -55°C to +85°C

NOTES

1. MATERIAL:



Housing(UPPER):PBT, UL 94V-0, Color:Black.
 Housing(LOWER):PBT, UL 94V-0, Color:Black.
 Connecting Pedestal:PBT, UL 94V-0, Color:Black.
 Terminal:Copper Alloy.
 Shell:SPCC.
 Shield:SPCC.
 Boardlock:Copper Alloy.
 Bracket:Zinc Alloy.
 Screw:Copper Alloy.

2. FINISH:

Terminal:Gold Plated over Nickel at Contact Area.
 Tin Plated over Nickel at Solder Ared.


Shell:Nickel Plated.
 Shield:Tin Plated.
 Boardlock:Tin Plated.
 Bracket:Nickel Plated.
 Screw:Nickel Plated.

3. This Product is LEAD-FREE & RoHS Compliance Product.

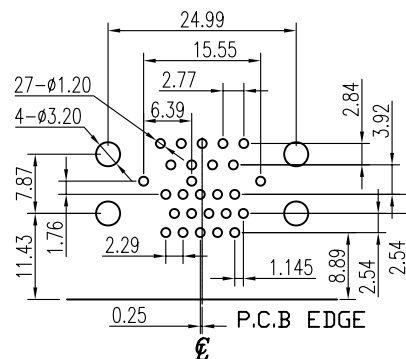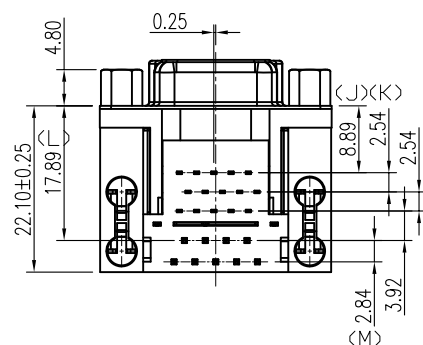

RECOMMENDED P.C.B LAYOUT

INSPECTION DIMENSION:(A)~(M)



RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ± 0.25
 .XXX ± 0.13
 ANG ± 2°

照片框

ORDER INFORMATION

DRB1-EN1983J-0935-LF

SERIES

09 TO 15 WAY

LEADFREE

JACKSCREW

3.92mm

8.89mm

SPACING 19.05mm

NUT

MALE TO FEMALE

DESCRIPTION:D-SUB 0.35"(8.89) FOOTPRINT 9 MALE /15 FEMALE HIGH DENSITY CONNECTOR DUAL PORT