


RECOMMEND P.C.B. LAYOUT
BOTTOM VIEW

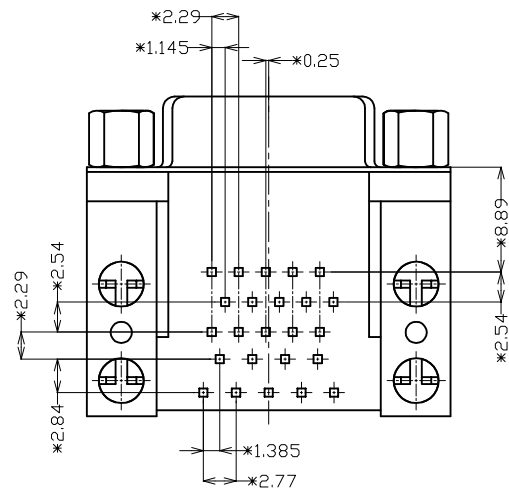

MATERIALS

- 1.HOUSING : THERMOPLASTIC (UL 94V-0).
- 2.TERMINAL : COPPER ALLOY.
- 3.SHELL : STEEL.

SPECIFICATION

- 1.CURRENT RATING : 5 AMPS. MAX.
- 2.DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
- 3.INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
- 4.CONTACT RESISTANCE : 30m OHMS MAX.
- 5.OPERATING TEMPERATURE : -55°C TO+105°C.
- 6.DURABILITY : 500 CYCLES.
- 7.MAX. PROCESSING TEMPERATURE : 230°C FOR 30~60 SECONDS.(HL-TEMP.PLASTIC)

8.*" 標示是重點管控尺寸

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.15
ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

DRB1-EN19J99-0935-LF

SERIES | LEADFREE
MALE TO FEMALE | 09 MALE TO 15 FEMALE
PC99
JACKSCRW
SPACING 19.05mm
NUT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 雙層9公線(322C)+15母藍8.89 叉鉚鎖半金縮9 19.05 螺絲4.8*11.8 無毒