

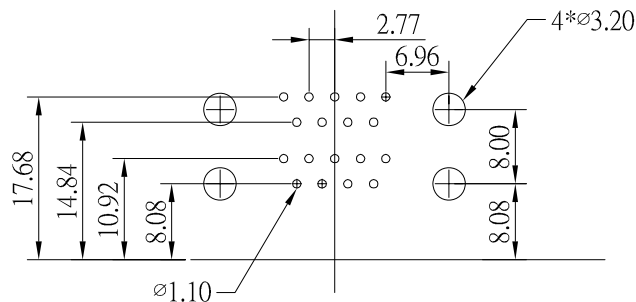
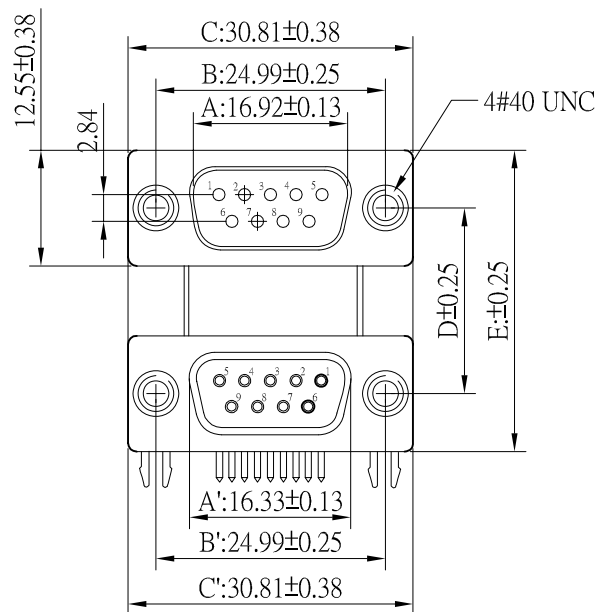


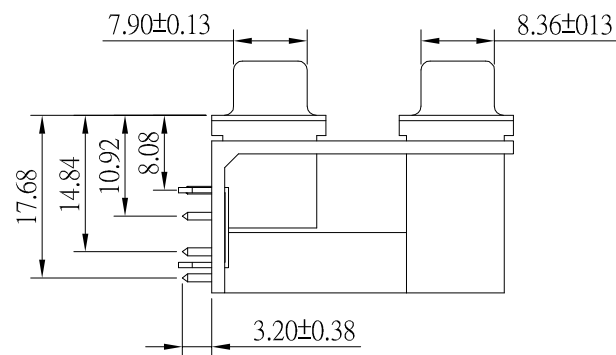

RECOMMENDED P.C.B. LAYOUT

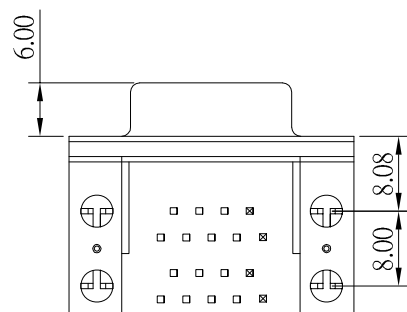

MATERIALS:

Contacts: Brass
Insulator: Polyester, UL 94V-0 Rated.
P.B.T or Nylon 9T
Shell: Cold Roller Steel.

FINISHES:

Contact: Gold Flash.
Shell: Nickel Plated.

ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 1 Amperes.
Dielectric withstanding: AC 1000V r.m.s.
Insulation Resistance: 5000 Megohms. Minimum.
at DC 500v.
Contact Resistance: 25 Milliohms Maximum.
Operating Temperature: -55° to +105°.

MECHANICAL CHARACTERISTICS:

Contact Insertion Force: 341 g. Maximum.
Contact Separation Force: 21 g. Minimum.

DIM. CON.	D	E
15	15.88	28.42
19	19.05	31.60
22	22.86	35.41

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.50
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

DRB1-ENxx-0909-LF

SERIES

LEADFREE
09 TO 09 WAY

MALE TO FEMALE

15:SPACING 15.88mm
19:SPACING 19.05mm
22:SPACING 22.86mm

NUT

DESCRIPTION: D-SUB Right Angle Dual Body Male/Female