

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:

Contact Current Rating:3 Amperes.
 Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.
 Insulation Resistance:5000 Medohms Minimum.at DC 500V.
 Contact Resistance:25 Milliohms Maximum.
 Operating Temperature:-55°C to+105°C.

MECHANICAL CHARACTERISTICS:


Contact Insertion Force:341 g.Maximum.
 Contact Seperation Force:21 g.Maximum.

MATERIALS:

Contacts:Bass.
 Insulator: PBT UL 94V-0 Rated.
 Shell:Cold Roller Steel.

FINISHES:

Contact:Gold Flash.
 Shell:Nickel Plated.

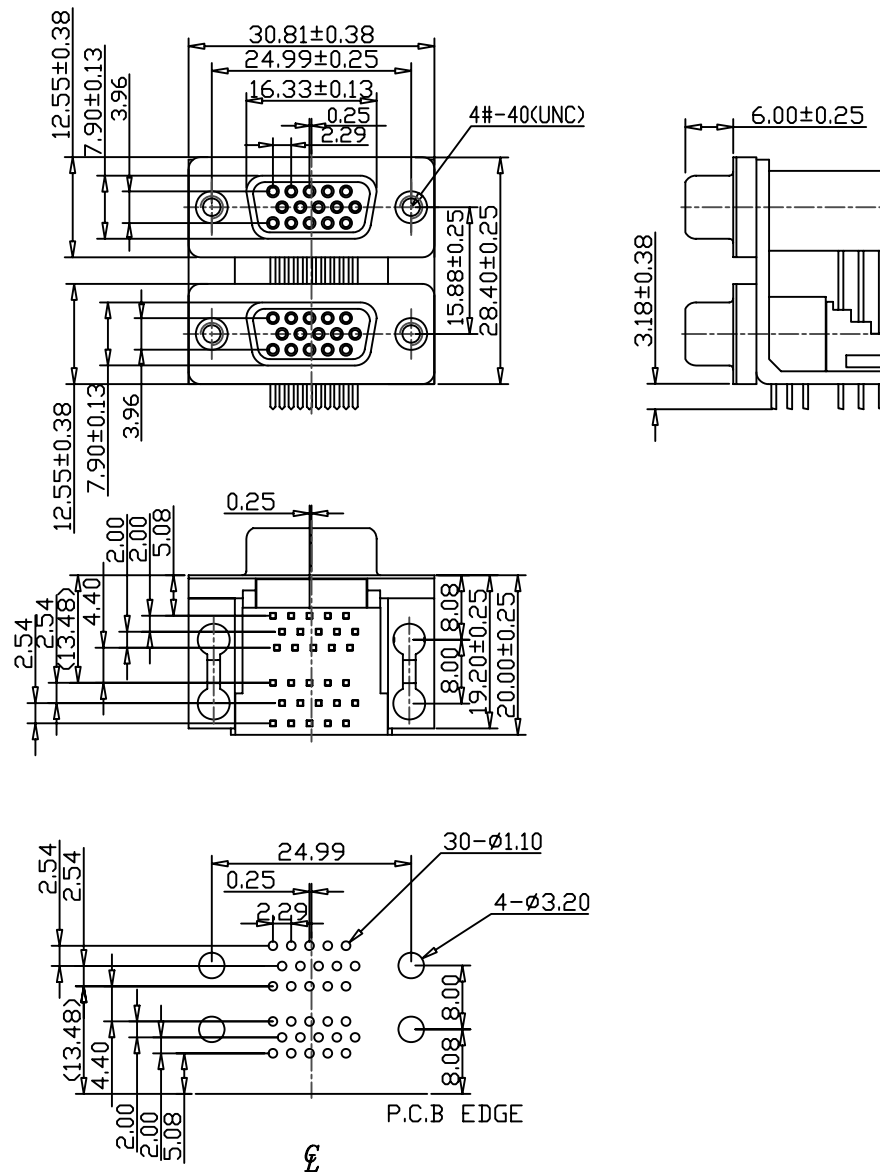

RECOMMENDED P.C.B LAYOUT



PART NO. DRB1-FN155-3535

DWG NO. DRB1-FN155-3535

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

D-SUB 0.20*(5.08mm) FOOTPRINT 15 FEMALE HIGH DENSITY CONNECTOR /15 FEMALE HIGH DENSITY CONNECTOR, DUAL PORT

煜倫股份有限公司

FILE NO.

DRAWING BY

.X ± 0.2
.XX ±
.XXX ±
AWG

AREA

REVISIONS

HK

DATE

UNIT / mm

SCALE 1:1

PROJECTION

