

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:

Contact Current Rating:3 Amperes.
 Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.
 Insulation Resistance:5000 Medohms Minimum.at DC 500V.
 Contact Resistance:25 Milliohms Maximum.
 Operating Temperature:-55°C to+105°C.

MECHANICAL CHARACTERISTICS:

Contact Insertion Force:341 g.Maximum.
 Contact Separation Force:21 g.Maximum.

MATERIALS:


Contacts:Bass.
 Insulator: PBT UL 94V-0 Rated.
 Shell: Cold Roller Steel.

FINISHES:


Contact:Gold Flash.

DRB1-FN19-3535-LF
 LEADFREE

RoHS Compliant

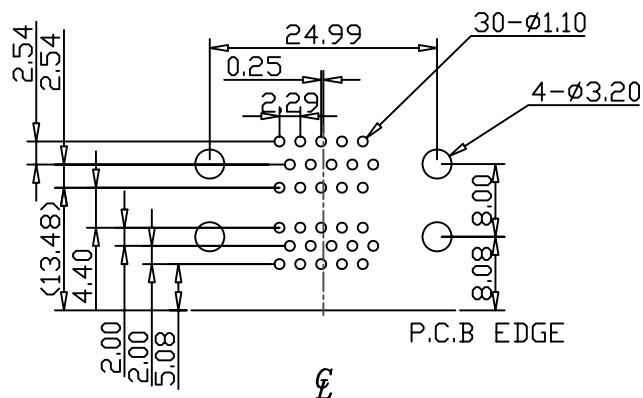

RECOMMENDED P.C.B LAYOUT

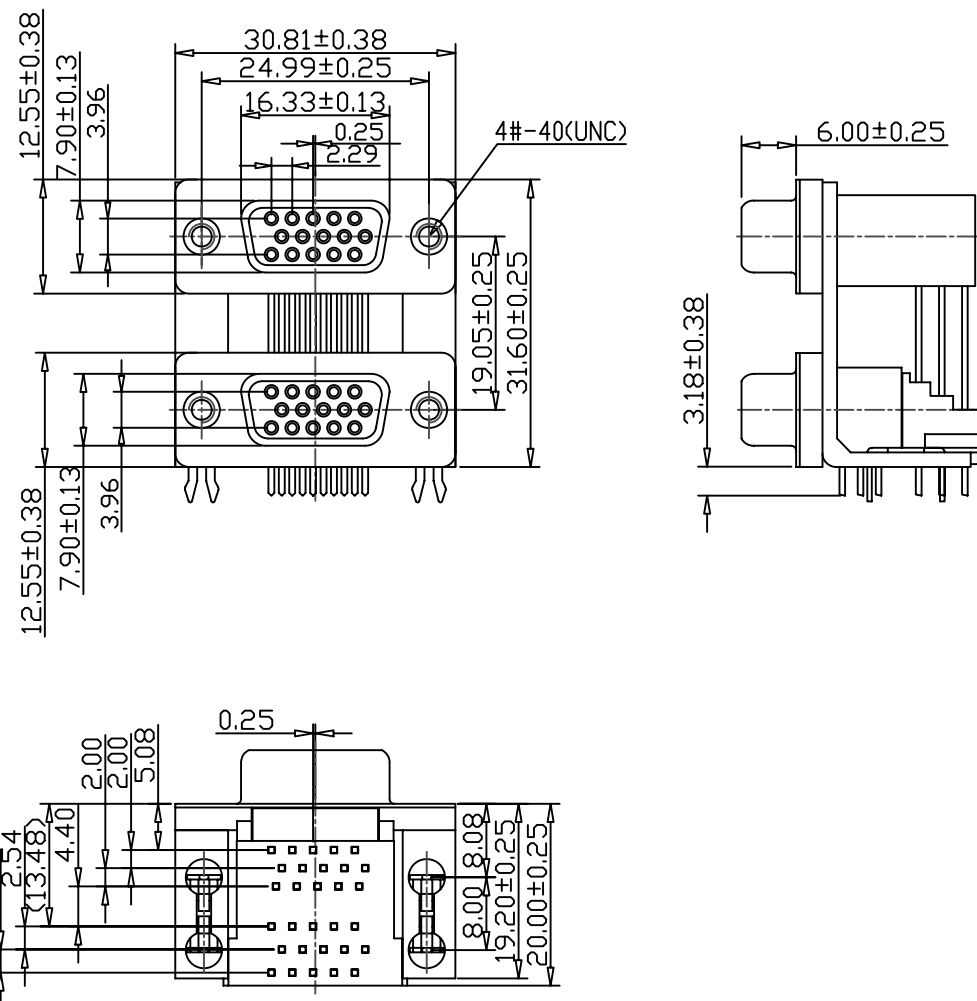

PART NO. DRB1-FN19-3535

DWG NO. DRB1-FN19-3535

FILE NO.

UNIT / mm

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2
 .XX ±
 .XXX ±
 AWG

DESCRIP TION:
 AREA

D-SUB 0.20"(5.08mm) FOOTPRINT 15 FEMALE
 D-SUB 0.20"(5.08mm) FOOTPRINT /15 FEMALE
 HIGH DENSITY CONNECTOR, DUAL PORT
 REVISIONS
 HK
 DATE

煜倫股份有限公司