

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 5 Amperes.
 Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.
 Insulation Resistance: 5000 MΩohms Minimum
 Contact Resistance: 25 Milliohms Maximum.
 Operating Temperature: -55°C to +105°C.

MECHANICAL CHARACTERISTICS:




Contact Insertion Force: 341 g. Maximum.
 Contact Separation Force: 21 g. Minimum.

MATERIALS:

Contacts: Brass.
 Insulator: PBT UL 94V-0 Rated.
 Shell: Cold Roller Steel.

FINISHES:

Contact: Gold Flash.
 Shell: Nickel Plated.

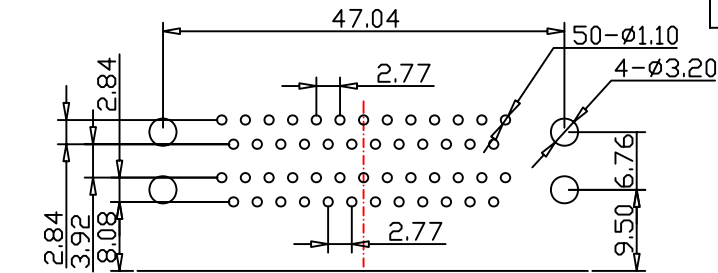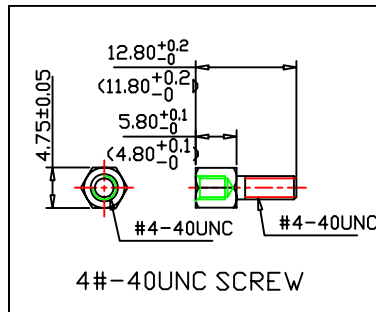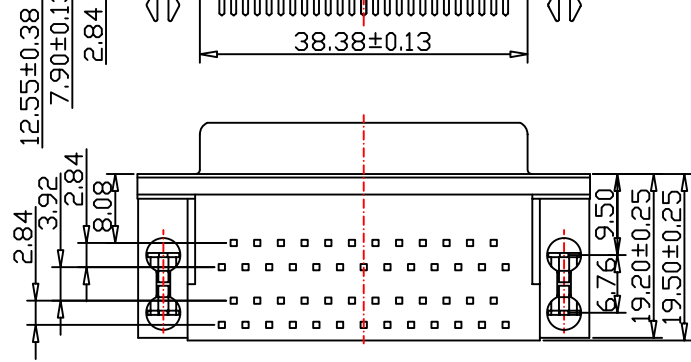

DRB1-FN19H-2525-LF

LEADFREE

RoHS Compliant



PART NO. DRB1-FN19H-2525

DWG NO. DRB1-FN19H-2525

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
 .XX ± 0.1
 .XXX ±
 AWG

DESCRIPTION: D-SUB CONNECTOR 25 FEMALE/25 FEMALE DUAL PORT

AREA

REVISIONS

HK

DATE

煜倫股份有限公司