
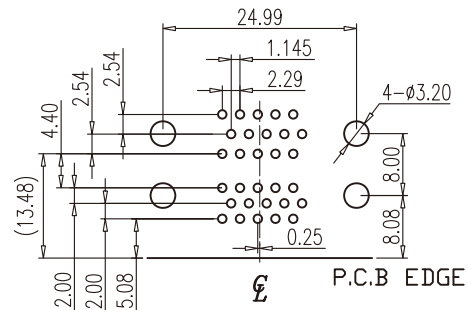


### SPECIFICATIONS

1. D-SUB
- 1.1 Voltage: 250 VAC(RMS) Max.
- 1.2 Current Rating: 3 Ampere per Contact
- 1.3 Contact Resistance: 25 Milliohms Max.
- 1.4 Insulation Resistance: 5000 Megohms Min.
- 1.5 Dielectric Withstanding Voltage: 1000 VAC(RMS)
- 1.6 Total Mating Force: 6.0 Kgf Max.
- 1.7 Total Unmating Force: 1.2 Kgf Min.
- 1.8 Operating Temperature: -55°C to +85°C

### NOTES

1. MATERIAL:
  - Housing:PBT, UL 94V-0, Color:Black.
  - Terminal:Copper Alloy.
  - Shell:SPCC.
  - Boardlock:Copper Alloy.
  - Bracket:Zinc Alloy.
  - Screw:Copper Alloy.
2. FINISH:
  - Terminal:Gold Plated over Nickel at Contact Area.
  - Tin Plated over Nickel at Solder Ared.
  - Shell:Nickel Plated.
  - Boardlock:Tin Plated.
  - Bracket:Nickel Plated.
  - Screw:Nickel Plated.
3. This Product is LEAD-FREE & RoHS Compliance Product.

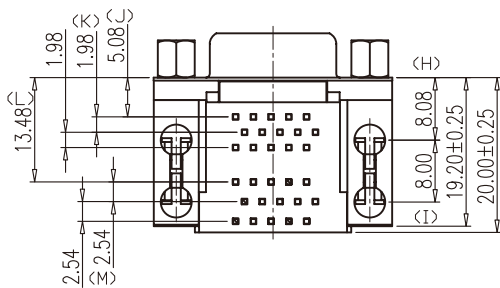

RECOMMENDED P.C.B LAYOUT

INSPECTION DIMENSION:(A)~(M)

DRB1-FN19J-3535-LF  
LEADFREE  
RoHS Compliant

**MORE THAN ALL**  
CONNECTORS  
ASSEMBLIES

煜倫股份有限公司

PART NO. DRB1-FN19J-3535

DWG NO. DRB1-FN19J-3535

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2  
.XX ±  
.XXX ±  
ANG

DESCRIPTION:

D-SUB 0.20\*(5.08mm) FOOTPRINT 15 FEMALE HIGH DENSITY CONNECTOR /15 FEMALE HIGH DENSITY CONNECTOR, DUAL PORT

AREA

REVISIONS

HK

DATE