

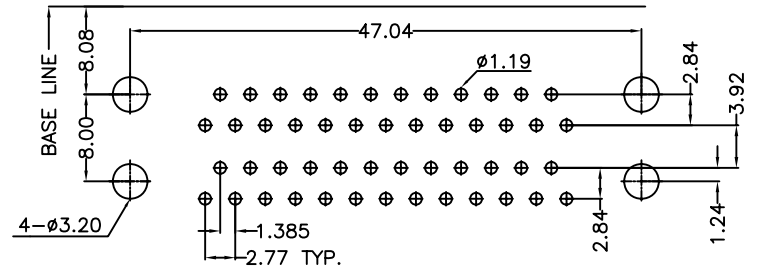
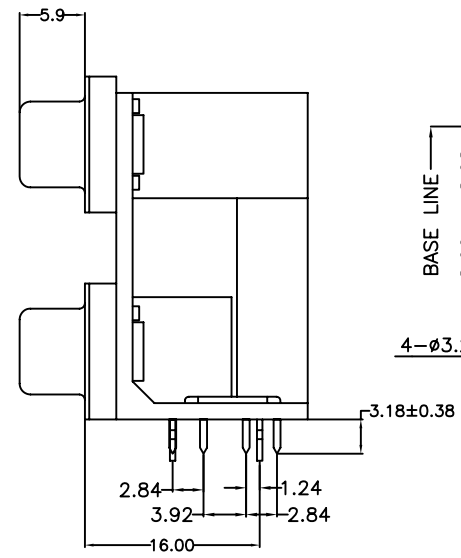


1 2 3 4 5 6 7 8 9 0

J  
I  
H  
G  
F  
E  
D  
C  
B  
A

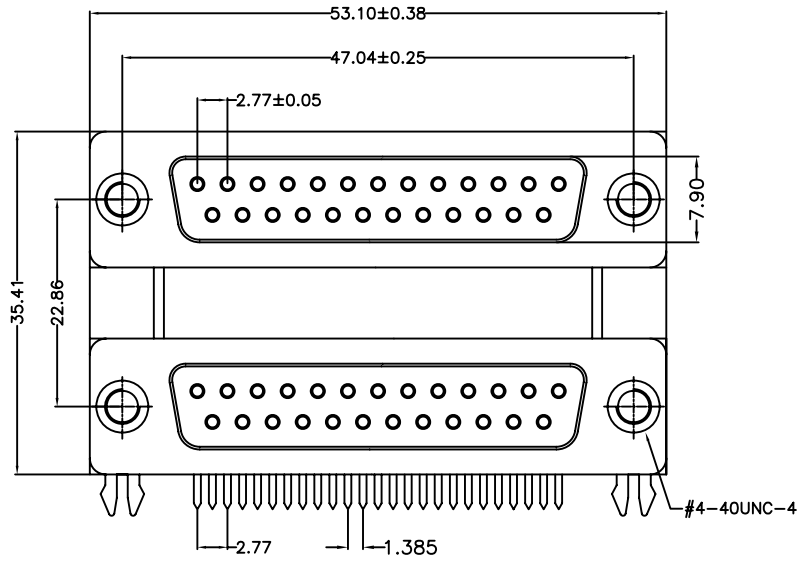

RECOMMEND P.C.B. LAYOUT  
BOTTOM VIEW

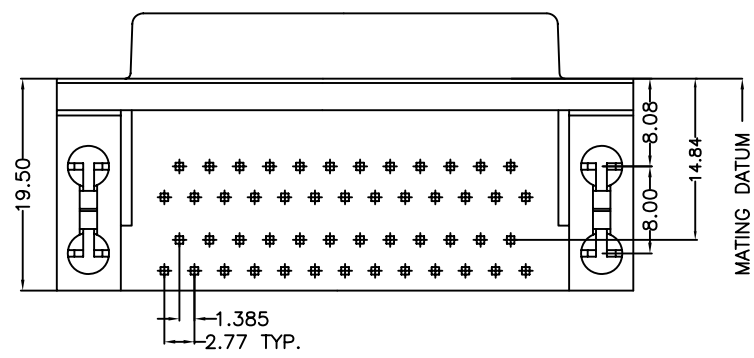

**MATERIALS**  
 INSULATOR:PBT+30% GLASS FIBER (UL 94V-0)BLACK.  
 CONTACT MATERIAL:BRASS.  
 CONTACT FINISH:GOLD OVER NICKEL.  
 SHELL FINISH:STEEL NICKEL PLATED.

**SPECIFICATION**  
 1.CURRENT RATING : 5 AMP. MAX.  
 2.DIELECTRIC WITHSTANDING VOLTAGE :  
 1000V AC R.M.S. FOR ONE MINUTE.  
 3.INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.  
 4.CONTACT RESISTANCE : 15m OHMS MAX.  
 5.OPERATING TEMPERATURE : -55°C TO+105°C.  
 6.DURABILITY : 500 CYCLES.

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

**煜倫股份有限公司**

PART NO. DRB1-FN23-2525		CHECKED BY CY		TOLERANCES ARE .X ± 0.38 .XX ± 0.25 .XXX ± .015 AWG	DESCRIP TION: 雙層25母雙排叉鉚半金黑22.86		
DWG NO. DRB1-FN23-2525		DRAWING BY					
UNIT / mm	SCALE 1:1	PROJECTION		AREA	REVISIONS	HK	DATE