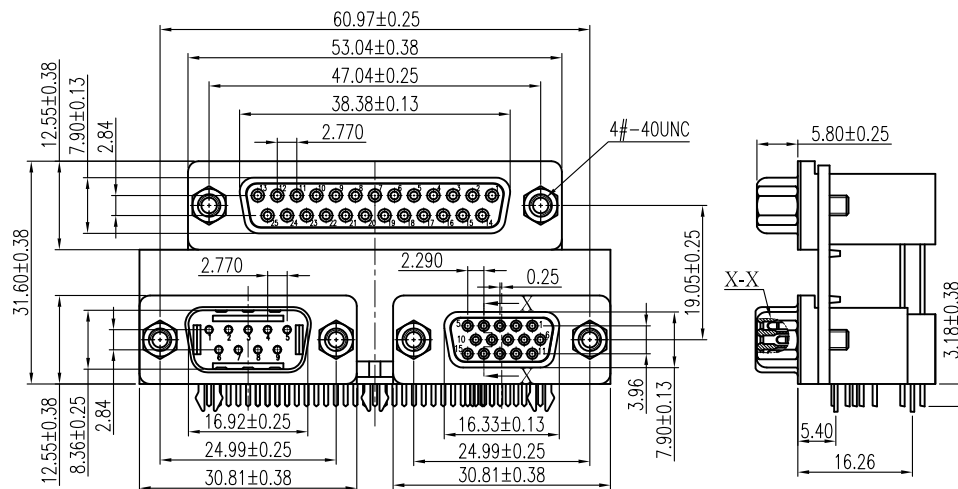


RECOMMENDED P.C.B LAYOUT

SPECIFICATIONS

1. D-SUB
- 1.1 Voltage: 250 VAC(RMS) Max.
- 1.2 Current Rating: 3 Ampere per Contact
- 1.3 Contact Resistance: 25 Milliohms Max.
- 1.4 Insulation Resistance: 5000 Megohms Min.
- 1.5 Dielectric Withstanding Voltage: 1000V AC(RMS)
- 1.6 Total Mating Force(25PIN): 9.4 Kgf Max.
- 1.7 Total Unmating Force(25PIN): 1.4 Kgf Min.
- 1.8 Total Mating Force(9PIN): 4.0 Kgf Max.
- 1.9 Total Unmating Force(9PIN): 1.0 Kgf Min.
- 1.A Total Mating Force(15PIN): 6.0 Kgf Max.
- 1.B Total Unmating Force(15PIN): 1.2 Kgf Min.
- 1.C Operating Temperature: -55°C to +85°C

NOTES

1. MATERIAL:
 - Housing(UPPER):PBT, UL 94V-0, Color:Purple.
 - Housing(LOWER-LEFT):PBT, UL 94V-0, Color:Green.
 - Housing(LOWER-RIGHT):PBT, UL 94V-0, Color:Blue.
 - Terminal:Copper Alloy.
 - Shell:SPCC.
 - Boardlock:Copper Alloy.
 - Bracket:Zinc Alloy.
 - Screw:Copper Alloy.
2. FINISH:
 - Terminal:Gold Plated over Nickel at Contact Area.
 - Tin Plated over Nickel at Solder Ared.
 - Shell:Nickel Plated.
 - Boardlock:Tin Plated.
 - Bracket:Nickel Plated.
 - Screw:Nickel Plated.
3. This Product is RoHS Compliance Product.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ± 0.25
.XXX ± 0.13
ANG ±

照片框

ORDER INFORMATION

DRB1-FN3J-2593-LF

SERIES

LEADFREE
25 TO 09/15 WAY

JACKSCREW
3.08mm

NUT

FEMALE TO MALE/ FEMALE

DESCRIPTION:TRIPLE D-SUB 25 FEMALE LP11 PORT/9 MALE COM PORT AND 15 FEMALE H/D VGA PORT