

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:

Contact Current Rating:3 Amperes.
 Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.
 Insulation Resistance:5000 Megohms Minimum
 Contact Resistance:25 Milliohms Maximum.
 Operating Temperature:-55°C to+105°C.

MECHANICAL CHARACTERISTICS:

D-SUB:

Contact Insertion Force:341 g.Maximum.
 Contact Separation Force:21 g.Minimum.

AUDIO JACK

Contact Insertion Force:3.0kg.Maximum.
 Contact Separation Force:0.4kg.Minimum.

MATERIALS:




Contacts:Brass.
 Insulator: NYLON 6T UL 94V-0 Rated.
 Shell: Cold Roller Steel.

FINISHES:

Contact:Gold Flash.
 Shell:Nickel Plated.

DRB1-FNJ-1503-LF
 J:JACKSCREW LEADFREE

RoHS Compliant

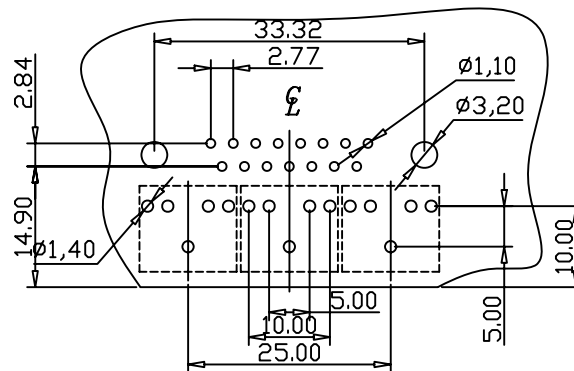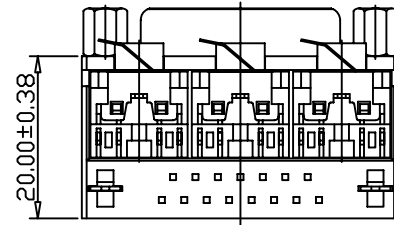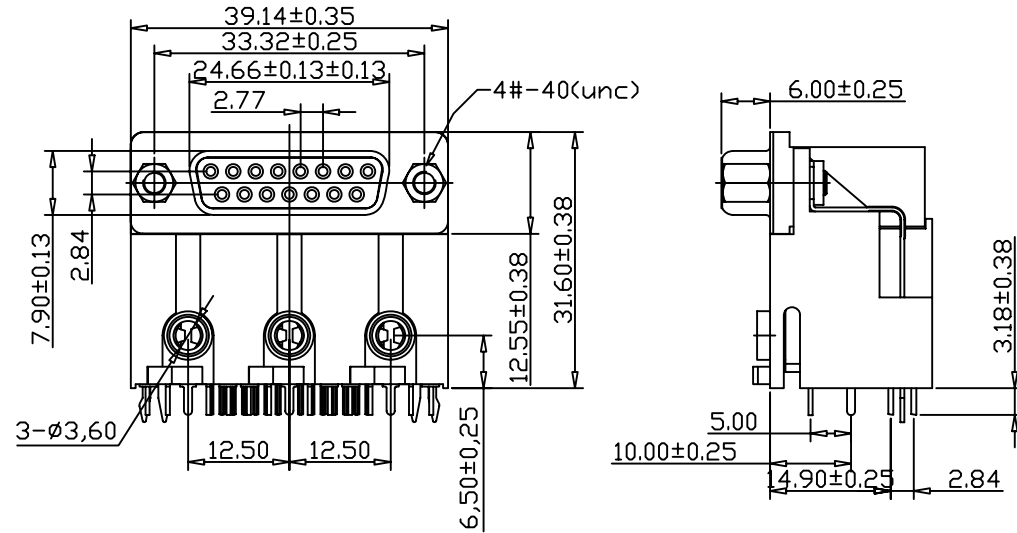

RECOMMENED P.C.B. AYDOUT



PART NO. DRB1-FNJ-1503		CHECKED BY CY	TOLERANCES ARE .X±0.2 .XX± .XXX± AWG	DESCRIP TION: D-SUB 15 FEMALE/ 3 PCS AUDIO JACK HIGH RAISE		
DWG NO. DRB1-FNJ-1503						
FILE NO.		DRAWING BY	AREA	REVISIONS	HK	DATE
UNIT / mm	SCALE 1:1	PROJECTION				

煜倫股份有限公司