
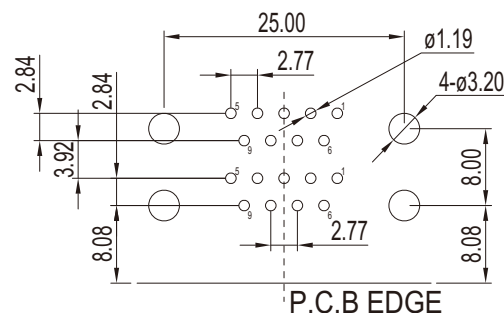
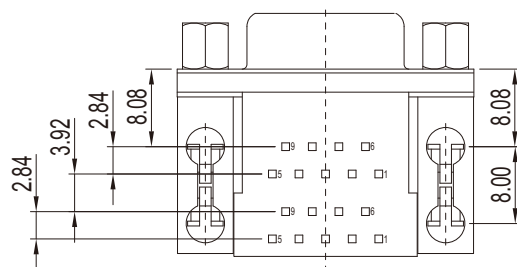
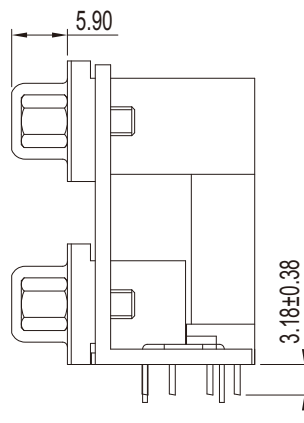


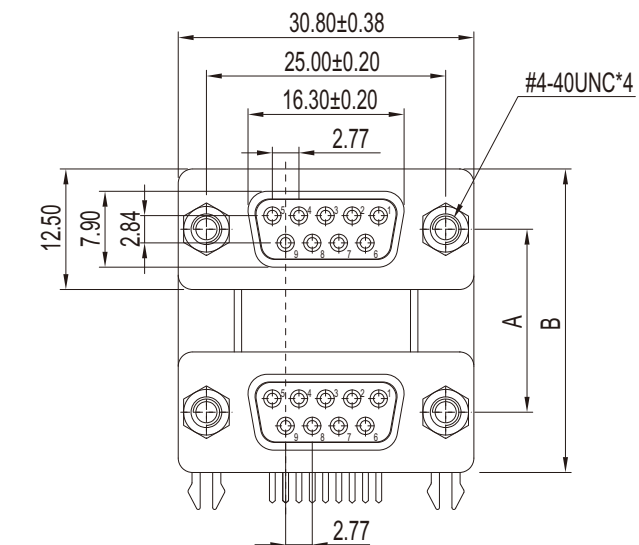

MATERIAL :

INSULATOR : THERMOPLASTIC, UL 94V-0.
 STANDARD : PBT.
 CONTACT : COPPER ALLOY.
 CONTACT FINISH : GOLD OVER NICKEL.
 SHELL : SPCC.
 BOARDLOCK : BRASS, TIN PLATED
 BRACKET : ZINC ALLOY, NICKEL PLATED.

SPECIFICATION :

CURRENT RATING : 5 AMP.
 DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC FOR 1 MINUTE.
 INSULATION RESISTANCE
 CONTACT RESISTANCE
 OPERATING TEMPERATURE : -55°C ~ +105°C

PORT SPACING	A±0.15	B±0.15
1	15.88	28.43
2	19.05	31.60

RECOMMENDED P.C.B LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

DRB1-FNxxJ-0909-LF

SERIES

FEMALE TO FEMALE

NUT

LEADFREE

09 TO 09WAY

JACKSCRW

15:SPACING 15.88mm

19:SPACING 19.05mm

DESCRIPTION: