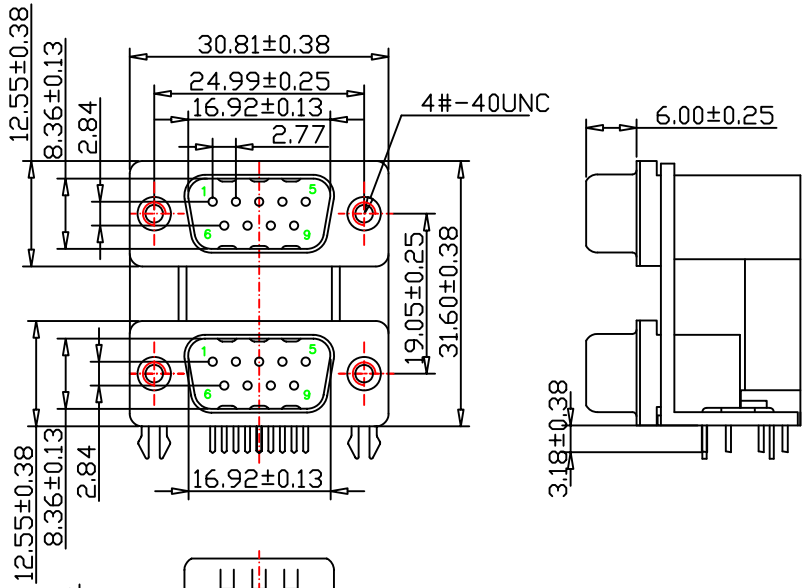

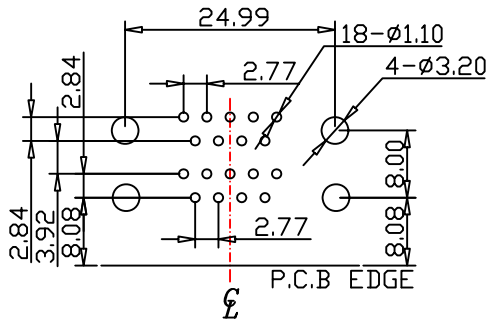

RECOMMENDED P.C.B LAYOUT

SPECIFICATIONS

ELECTRICAL CHARACERISTICS:
Contact Current Rating:5 Amperes.
Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.
Insulation Resistance:5000 Megohms Minimum
Contact Resistance:25 Milliohms Maximum.
Operating Temperature:-55°C to+105°C.

MECHANICAL CHARACTERISTICS:
Contact Insertion Force:341 g.Maximum.
Contact Separation Force:21 g.Minimum.

MATERIALS:
Contacts:Brass.
Insulator: PBT UL 94V-0 Rated.
Shell:Cold Roller Steel.

FINISHES:
Contact:Gold Flash.
Shell:Nickel Plated.

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ± .X ± .XX ± .XXX ± ANG ±
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PPOJECTION	

照片框

ORDER INFORMATION

DRB1-MN19-0909-LF

SERIES
NUT
MALE TO MALE
SPACING 19.05mm
09 TO 09 WAY
LEADFREE

DESCRIPTION: