


RECOMMENDED P.C.B. LAYOUT

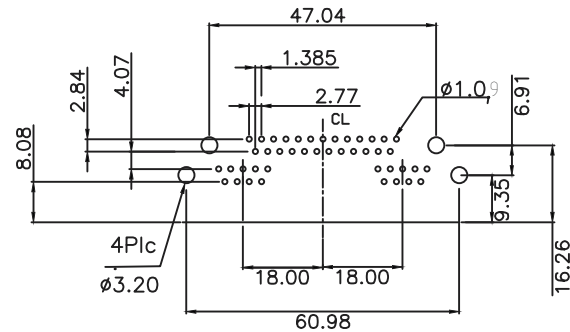

ELECTRICAL CHARACTERISTICS

Contact Current Rating:1.5Amperes.
 Dielectric Withstanding Voltage:AC 500V at sea level.
 Insulation Resistance:1000Megohms Min.
 Contact Resistance:30Milliohms Max.
 Operating Temperature:-55°C to +105°C

MECHANICAL CHARACTERISTICS

Mating Force:3.5Kg.Maximum.
 Unmating Force:1Kg.Minimum.

Material

Housing:PBT
 Contact:Copper Alloy
 Shell:SPCC
 Z-Piece:Copper Alloy
 Rivet:Copper Alloy
 Screw:Iron

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X.±
 .X±
 .XX±
 .XXX±
 ANG±

P PROJECTION

照片框

ORDER INFORMATION

DRB1-MN194-2599-LF

SERIES | | | | LEADFREE
 | | | | 25 TO 09/09 WAY
 | | | | TYPE 4
 | | | | SPACING 19.05mm
 | | | | NUT
 | | | | MALE TO MALE

DESCRIPTION: 25M/9M-9M