

# SPECIFICATIONS

## ELECTRICAL CHARACTERISTICS:

Contact Current Rating:3 Amperes.  
 Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.  
 Insulation Resistance:5000 Medohms Minimum.at DC 500V.  
 Contact Resistance:25 Milliohms Maximum.  
 Operating Temperature:-55°C to+105°C.

## MECHANICAL CHARACTERISTICS:



Contact Insertion Force:341 g.Maximum.  
 Contact Separation Force:21 g.Maximum.

## MATERIALS:

Contacts:Bass.  
 Insulator: PBT UL 94V-0 Rated.  
 Shell:Cold Roller Steel.

## FINISHES:

Contact:Gold Flash.

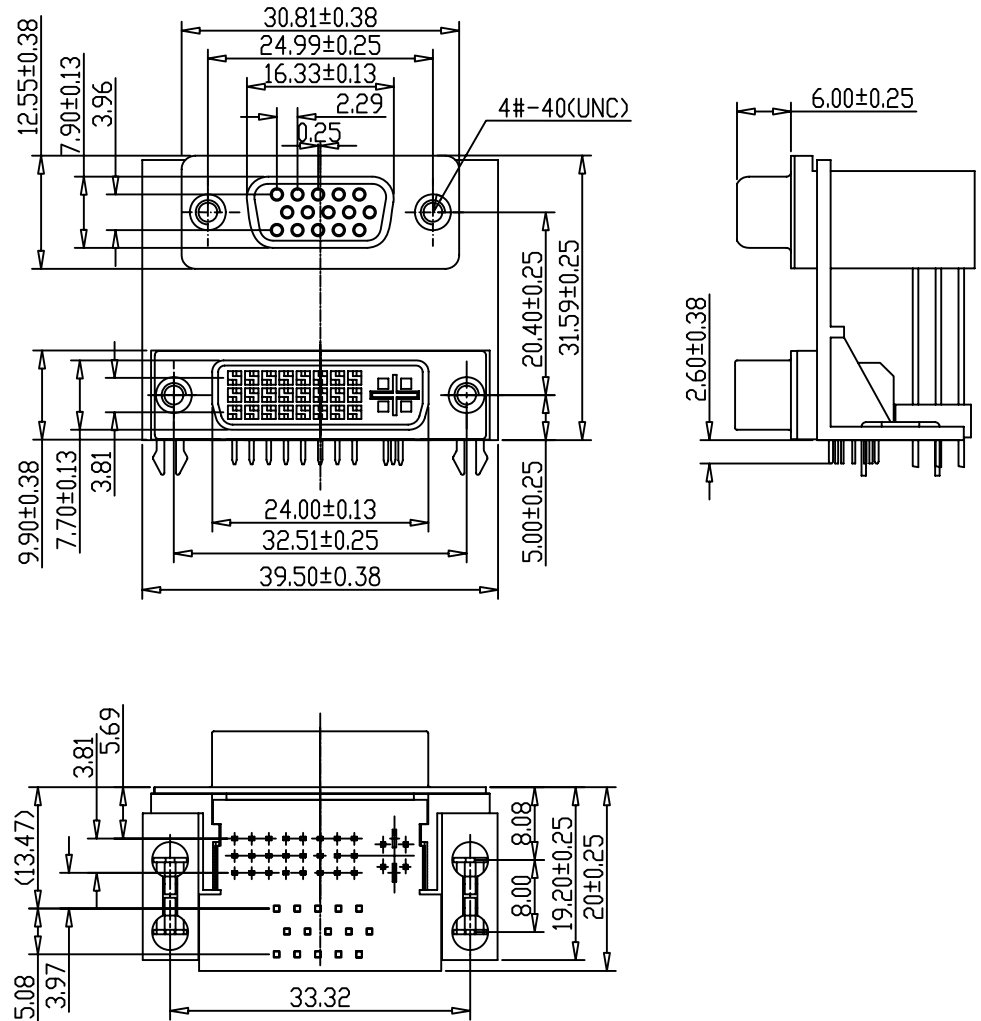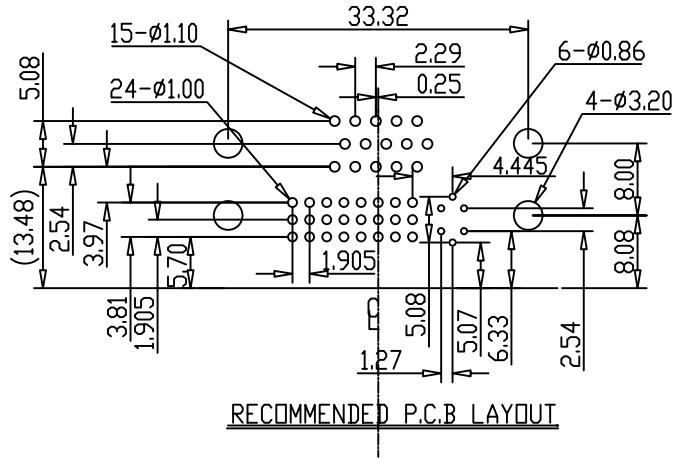

RoHS Compliant



PART NO. DRDVIB1-FN20-3524+5

DWG NO. DRDVIB1-FN20-3524+5

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.35  
 .XX ± 0.25  
 .XXX ± 0.13  
 AWG

DESCRIP TION:

**D-SUB HIGH DENSITY 15 FEMALE /DVI-I FEMALE RIGHT ANGLE**

AREA

REVISIONS

HK

DATE

煜倫股份有限公司