


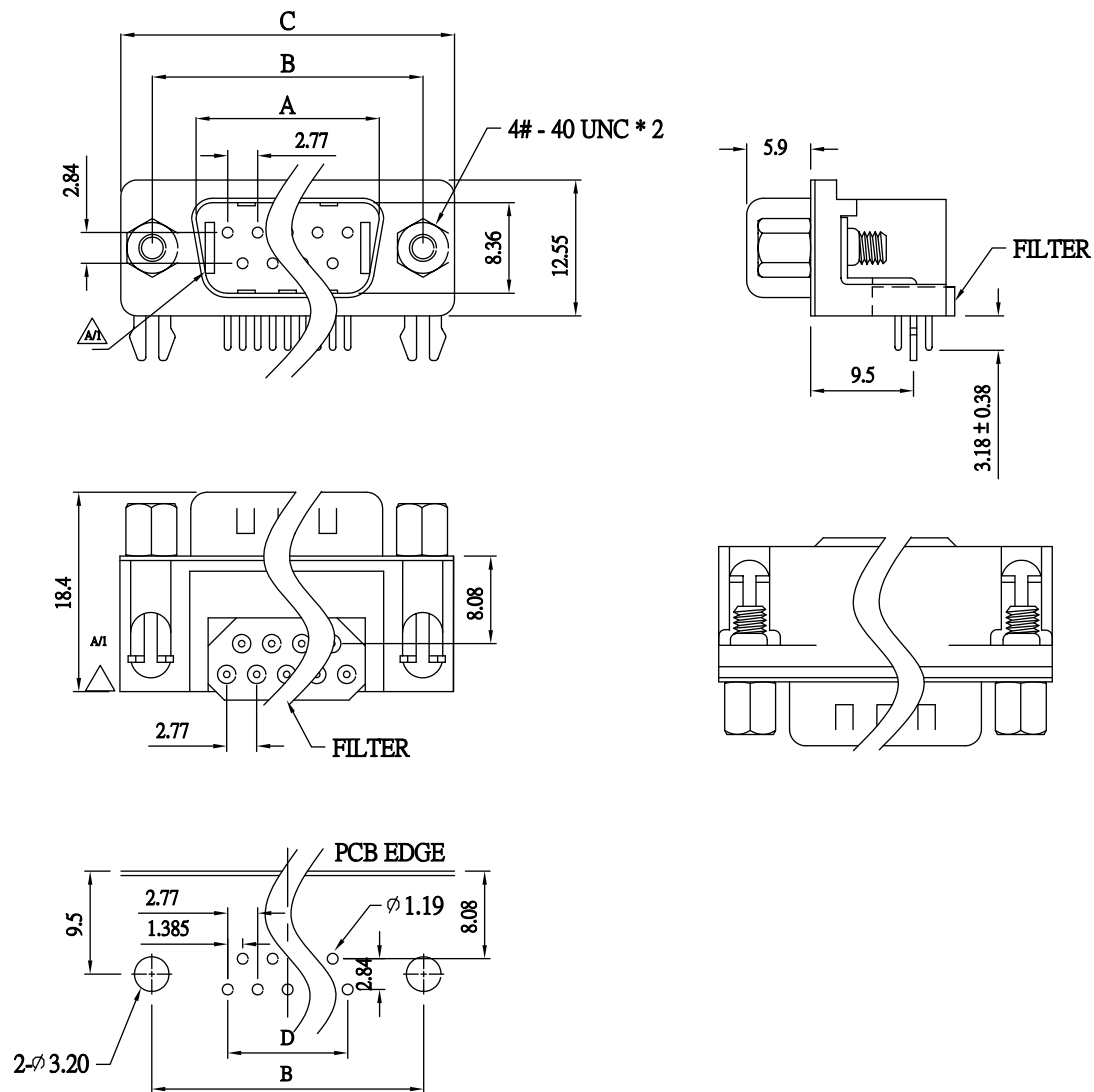

MATERIAL:

INSULATOR : PBT+30% GLASS FIBER (UL 94V-0) BLACK.

CONTACT MATERIAL : COPPER ALLOY.

CONTACT FINISH : GOLD OVER NICKEL.

SHELL FINISH : STEEL NICKEL PLATED.

SPECIFICATION:

CURRENT RATING : 5 AMP

DIELECTRIC WITHSTANDING VOLTAGE : 1000V PER MINUTE.

INSULATION RESISTANCE : 1000MΩ MIN. AT 500V DC.

CONTACT RESISTANCE : 15mΩ MAX. 10 SEC.

OPERATING TEMPERATURE : -55°C ~ +105°C.

SHELL SIZE	Dim A ± 0.20	Dim B ± 0.25	Dim C ± 0.38	Dim D
09 pin	16.92	24.99	30.80	11.08
15 pin	25.25	33.32	39.10	19.39
25 pin	38.96	47.04	53.00	33.24
37 pin	55.42	63.50	69.32	49.86

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

ORDER INFORMATION

DRF-Px-xx-LF
SERIES | T LEADFREE
09~37 WAY
S:SEMI GOLD
G:FULL GOLD
MALE

DESCRIPTION: D-SUB CONN. RIGHT ANGLE, EMI MALE FOOTPRINT : 8.08mm