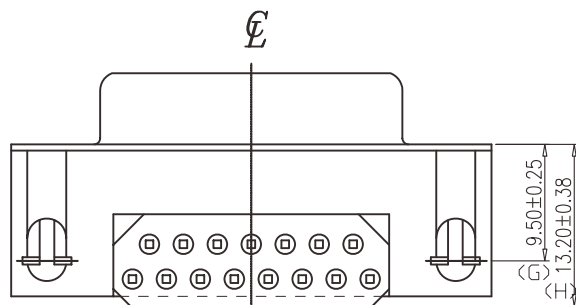
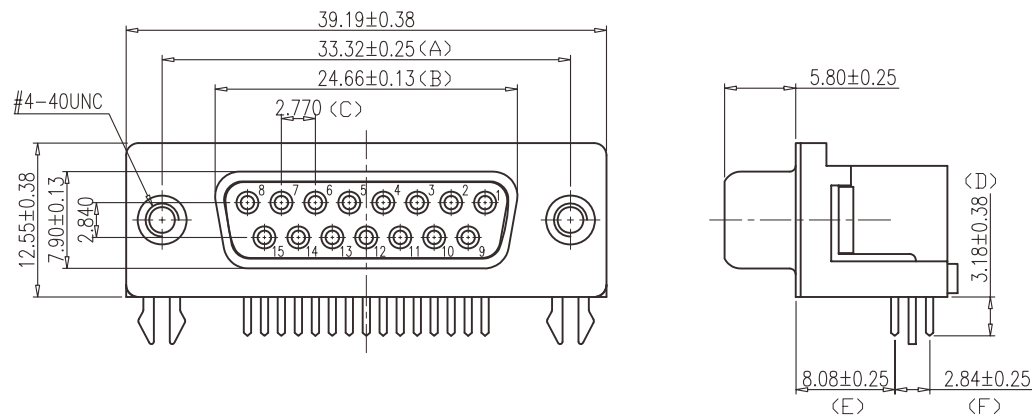


RECOMMENDED P.C.B LAYOUT
INSPECTION DIMENSION:(A)~(H)

SPECIFICATIONS

1. D-SUB
- 1.1 Voltage: 250 VAC(RMS) Max.
- 1.2 Current Rating: 3 Ampere per Contact
- 1.3 Contact Resistance: 25 Milliohms Max.
- 1.4 Insulation Resistance: 5000 Megohms Min.
- 1.5 Dielectric Withstanding Voltage: 1000 VAC(RMS)
- 1.6 Total Mating Force: 6.0 Kgf Max.
- 1.7 Total Unmating Force: 1.2 Kgf Min.
- 1.8 Operating Temperature: -55°C to $+85^{\circ}\text{C}$

NOTES

1. MATERIAL:
Housing:PBT, UL 94V-0, Color:Black.
Terminal:Copper Alloy.
Shell:SPCC.
Boardlock:Copper Alloy.
Rivet:Copper Alloy.
2. FINISH:
Terminal:Gold Plated
Shell:Nickel Plated.
Boardlock:Tin Plated.
Rivet:Nickel Plated.
3. This Product is LEAD-FREE & RoHS Compliance Product.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
X, $\pm$
.XX $\pm$ 0.25
.XXX $\pm$ 0.13
ANG $\pm$ 2°

照片框

ORDER INFORMATION

DRF-SGN-15-LF
SERIES | | | LEADFREE
15 WAY
NUT
FULL GOLD
FEMALE

DESCRIPTION: D-SUB 0.318"(8.08mm) FOOTPRING, RIGHT ANGLE, WITH FERRITE