
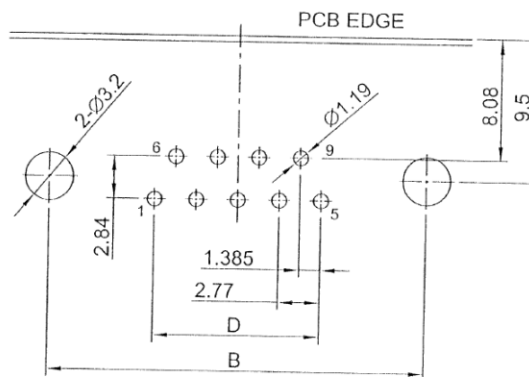
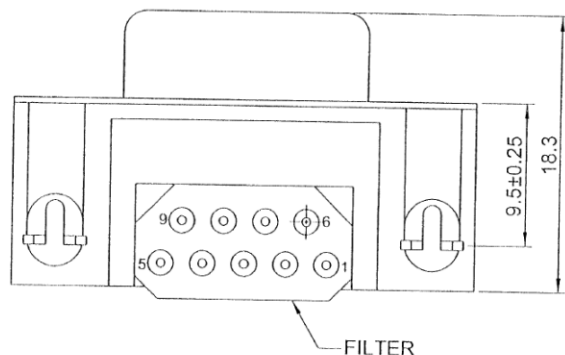
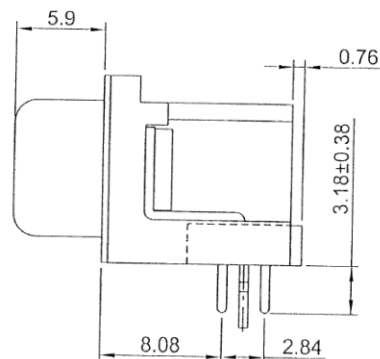


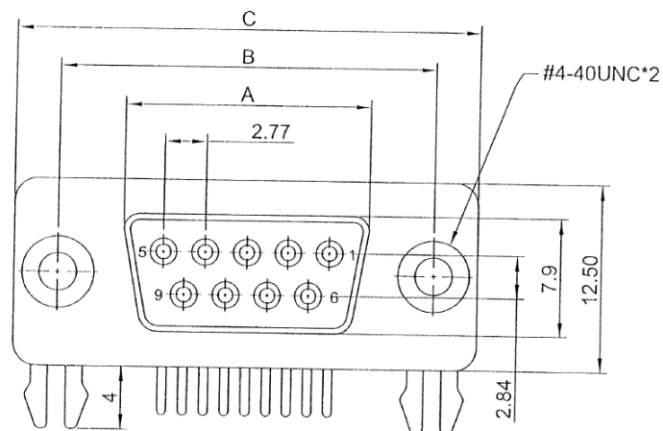


POSITION	A ± 0.20	B ± 0.20	C ± 0.38	D
09 PIN	16.30	25.00	30.80	11.08
15 PIN	24.60	33.30	39.20	19.39
25 PIN	38.35	47.05	53.05	33.24
37 PIN	54.80	63.50	69.40	49.86

MATERIAL:

INSULATOR : PBT, UL 94V-0. Δ
 CONTACT : COPPER ALLOY.
 CONTACT FINISH : GOLD OVER NICKEL.
 SHELL : STEEL.
 BOARDLOCK : BRASS, TIN PLATED.
 RIVETED INSERT : BRASS, NICKEL PLATED.

SPECIFICATION:

CURRENT RATING : 5 AMP.
 DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC FOR 1 MINUTE.
 INSULATION RESISTANCE : 1000M Ω MIN. AT 500V DC.
 CONTACT RESISTANCE : 15m Ω MAX.
 OPERATING TEMPERATURE : -55°C ~ +105°C.

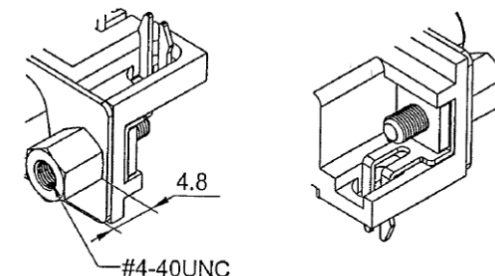

4-40 THREADED RIVETED W/BOARDLOCK AND JACK SCREWS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION Φ

X, $\pm$
 .X $\pm$ 0.25
 .XX $\pm$ 0.15
 .XXX $\pm$ 0.05
 ANG $\pm$ 1°

照片框

ORDER INFORMATION

DRF-SGNJ-xx-LF
 SERIES | | | LEADFREE
 | | | 09~37 WAY
 FEMALE | | JACKSCREW
 | | NUT
 | | FULL GOLD

DESCRIPTION: