


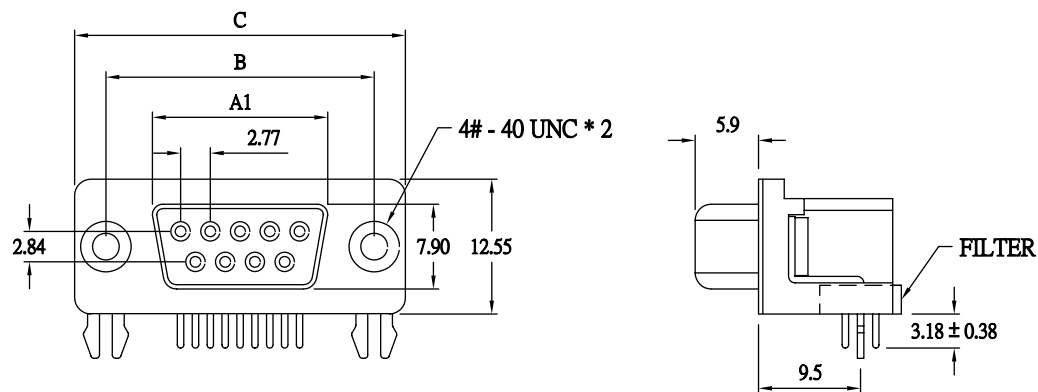

MATERIAL:

INSULATOR : PBT+30% GLASS FIBER (UL 94V-0) BLACK.

CONTACT MATERIAL : BRASS OR PHOSPHOR BRONZE.

CONTACT FINISH : GOLD OVER NICKEL.

SHELL FINISH : STEEL NICKEL PLATED.

SPECIFICATION:



CURRENT RATING : 5 AMP

DIELECTRIC WITHSTANDING VOLTAGE : 1000V PER MINUTE.

INSULATION RESISTANCE : 1000M Ω MIN. AT 500V DC.

CONTACT RESISTANCE : 15m Ω MAX. 10 SES.

OPERATING TEMPERATURE : -55°C ~ +105°C.

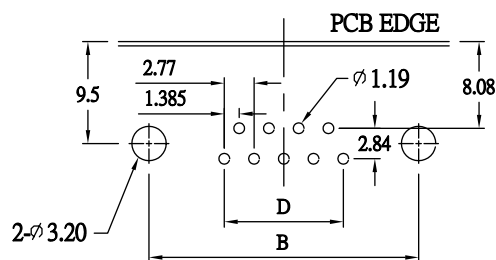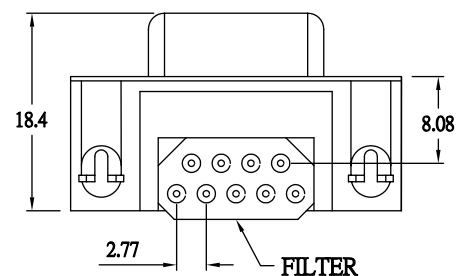

SHELL SIZE	Dim A1 ± 0.20	Dim B ± 0.25	Dim C ± 0.38	Dim D
09 pin	16.33	24.99	30.80	11.08
15 pin	24.66	33.32	39.10	19.39
25 pin	38.38	47.04	53.00	33.24
37 pin	54.84	63.50	69.32	49.86

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DRF-SSN-xx-LF
SERIES T T LEADFREE
09~37 WAY
NUT
SEMI GOLD
FEMALE

DESCRIPTION: D-SUB CONN. RIGHT ANGLE, EMI FEMALE FOOTPRINT : 8.08mm