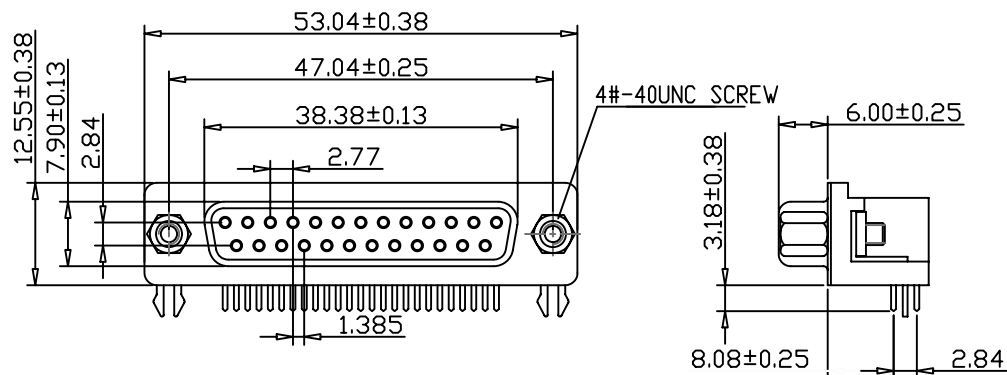


℄ P.C.B. EDGE

RECOMMENDED P.C.B. LAYOUT

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:

Contact Current Rating:3 Amperes.
Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.
Insulation Resistance:5000 Medohms Minimum.at DC 500V.
Contact Resistance:25 Milliohms Maximum.
Operating Temperature:-55°C to+105°C.

MECHANICAL CHARACTERISTICS:

Contact Insertion Force:341 g.Maximum.
Contact Separation Force:21 g.Minimum.

MATERIALS:

Contacts:Brass.
Insulator: PBT UL 94V-0 Rated.
Shell:Cold Roller Steel.

FINISHES:

Contact:Gold Flash.
Shell:Nickel Plated.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DRF-SSNJ-25-LF
SERIES | | | | LEADFREE
| | | | 25 WAY
| | | | JACKSCREW
| | | | NUT
| | | | SEMI GOLD
| | | | FEMALE

DESCRIPTION: D-SUB 0.318"(8.08mm) FOOTPRING, RIGHT ANGLE,WITH FERRITE