
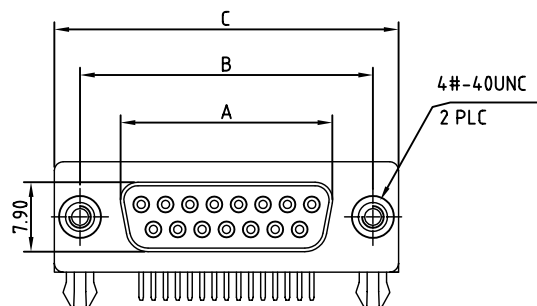


ELECTRICAL CHARACTERISTICS

Contact Current Rating: 3Amperes.
Dielectric Withstanding Voltage: AC 500V at sea level.
Insulation Resistance: 1000Megohms Min.
Contact Resistance: 30Milliohms Max.
Operation Temperature : -55°C to +105°C.

Material


Contact :Copper Alloy.
Insulator:PBT. (Select PA6T /LCP /PA9T)
Shell: SPCC.
Z-Piece: Copper Alloy.
Screw: Copper Alloy.
Rivet: Copper Alloy. or Zinc.

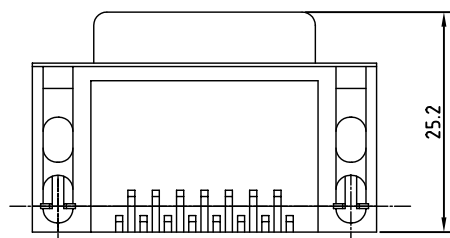

Note

No.	A	B	C
09	16.33	24.99	30.81
15	24.66	33.32	39.14
25	38.38	47.04	53.04
37	54.83	63.50	69.32

Recommend PCB Layout

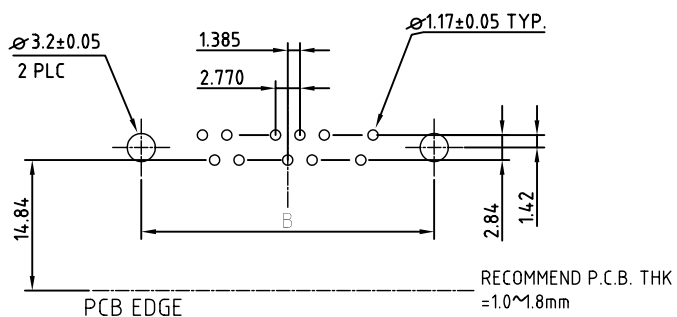

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

DRL-SGNH-xx-LF

SERIES | T | T | T | LEADFREE
09~37 WAY
FEMALE | T | T | T | HEX SCREW
NUT
FULL GOLD

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±