

Note:

1.Material:

- 1.1 Insulator: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: Copper alloy,t=0.20mm
- 1.3 Shell: Spcc,t=0.30mm

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 750 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mW Max.
- 2.4 Insulation resistance: 1000 MW Min.
- 2.5 Total mating force: 7.0 Kgf Max.
- 2.6 Total unmating force: 1.5 Kgf Min.
- 2.7 Temperature range: -55°C~85°C

| PART NO.  | A±0.25 | B±0.2 | C±0.2 | D±0.2 | E±0.2 | I±0.1 |
|-----------|--------|-------|-------|-------|-------|-------|
| DRM-PG-09 | 30.81  | 24.99 | 16.92 | 8.38  | 12.55 | 2.84  |
| DRM-PG-15 | 39.25  | 33.32 | 25.25 | 8.38  | 12.55 | 2.84  |
| DRM-PG-25 | 53.04  | 47.04 | 38.96 | 8.38  | 12.55 | 2.84  |
| DRM-PG-37 | 69.32  | 63.50 | 55.42 | 8.38  | 12.55 | 2.84  |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE


SIZE A4

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ± 0.10  
ANG ±

P PROJECTION



ORDER INFORMATION

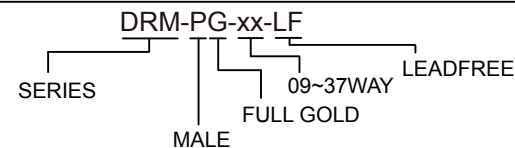

DESCRIPTION: D-SUB RIGHT ANGLE P.C.B. TYPE (M) 9.4