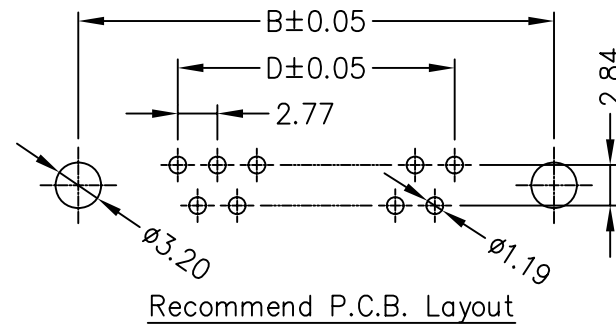
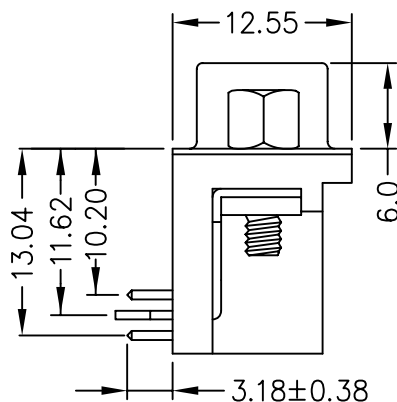
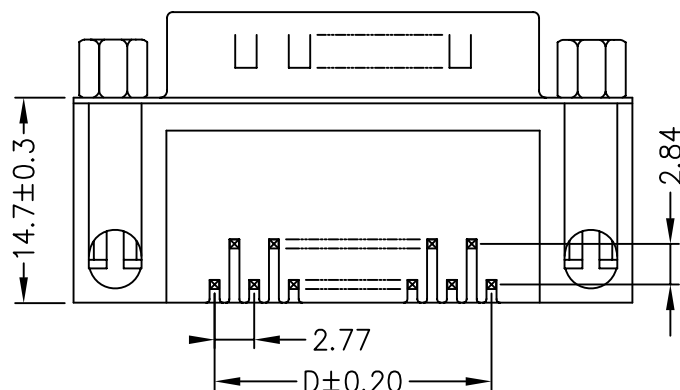
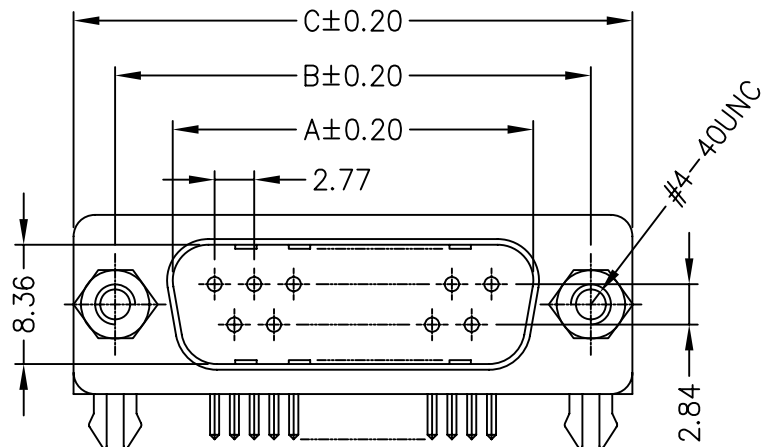


Material:

1. Insulator: PBT+30% Glass Fiber(Meet UL94V-0).
2. Contact: Copper Alloy.
3. Contact Plated: Selective Gold over Nickel Plated.
4. Shell: Steel with Nickel or Tin or Zinc Plated.

Specification:

1. Current Rating: 5 Amps.
2. Withstanding Voltage: AC 500V for 1 Minute.
3. Insulation Resistance: 1000MΩ Min. at DC 500V.
4. Contact Resistance: 15mΩ Max..
5. Operating Temperature: -40°C~+105°C.

No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D
DRM-PGNJ-09	16.92	24.99	30.81	11.08
DRM-PGNJ-15	25.25	33.32	39.14	19.39
DRM-PGNJ-25	38.96	47.04	53.04	33.24
DRM-PGNJ-37	55.42	63.50	69.32	49.86

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X.±
.X±
.XX±
.XXX±
ANG±

照片框

ORDER INFORMATION

DRM-PGNJ-xx-LF
SERIES T T T LEADFREE
09~37 WAY
JACKSCREW
NUT
FULL GOLD
MALE

DESCRIPTION: D-S-ub Male Right Angle Connector Footprint 10.20mm Clinch Nut/Screw Lock Type