
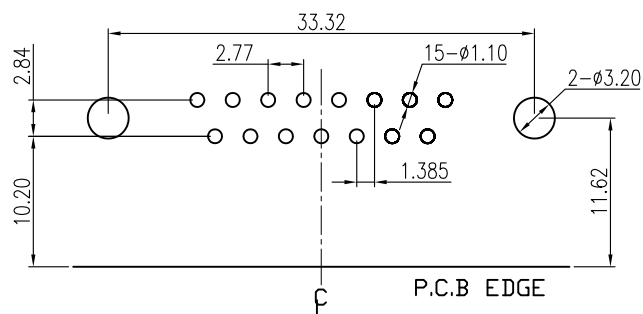
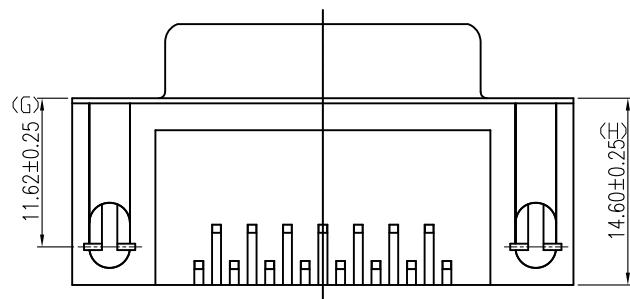


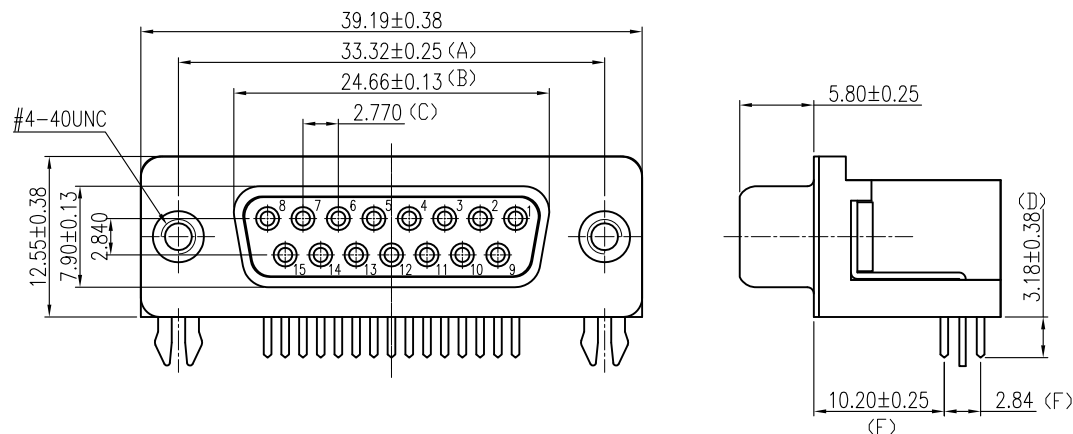

RECOMMENDED P.C.B LAYOUT

NOTES

- MATERIAL:**
Housing: PBT, UL 94V-0, Color: Black.
Terminal: Copper Alloy.
Shell: SPCC.
Boardlock: Copper Alloy.
Rivet: Copper Alloy.
- FINISH:**
Terminal: Gold Plated over Nickel at Contact Area
Tin Plated over Nickel at Solder Area.
Shell: Nickel Plated.
Boardlock: Tin Plated.
Rivet: Nickel Plated.
- This Product is LEAD-FREE & RoHS Compliance Product.

SPECIFICATIONS

- D-SUB
 - Voltage: 250 VAC(RMS) Max.
 - Current Rating: 3 Ampere per Contact
 - Contact Resistance: 25 Milliohms Max.
 - Insulation Resistance: 5000 Megohms Min.
 - Dielectric Withstanding Voltage: 1000 VAC(RMS)
 - Total Mating Force: 6.0 Kgf Max.
 - Total Unmating Force: 1.2 Kgf Min.
 - Operating Temperature: -55°C to +85°C

CONTACT FINISH

G/F FULL GOLD

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DRM-SGN-15-LF
SERIES | LEADFREE
15 WAY
NUT
FULL GOLD
FEMALE

DESCRIPTION: D-SUB 0.409" (10.40mm) FOOTPRING, RIGHT ANGLE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com