


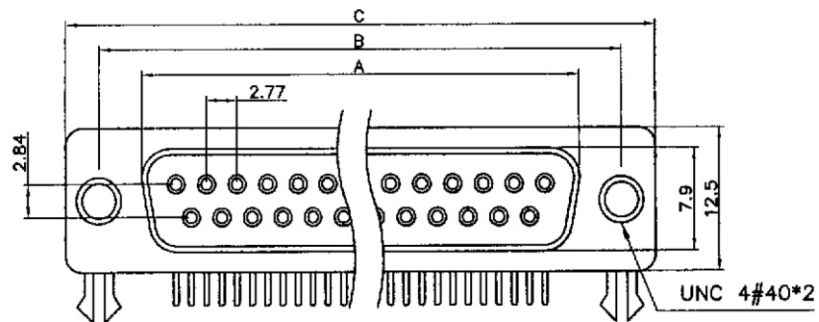

POSITION	A	B	C
9F	16.30	25.00	30.8
15F	24.60	33.30	39.2
25F	38.30	47.10	53.1
37F	54.80	63.50	69.4

SPECIFICATION

MATERIAL

Insulator: Thermal Plastic UL94V-0

Contacts: Copper Alloy

Shell: Steel

Rivet, Boardlock: Copper Alloy

CONTACT PLATING

Underplate: 50u" Nickel

Contact Area: 1u"~30u" Selective Gold

Solder Tails Area: 100u" Tin/Lead(Brighten Tin) or

100u" Tin/Lead Free(Brighten Tin/Matte Tin)

ELECTRICAL

Operation Voltage: 250 VAC Max.




Current Rating: 3 Amps

Contact Resistance: 15 Mohms

Insulation Resistance: 3000 Mohms Min @ 500 VDC


Dielectric Withstanding Voltage: 1000 VAC / Minute

Operating Temperature: -55°C TO +105°C

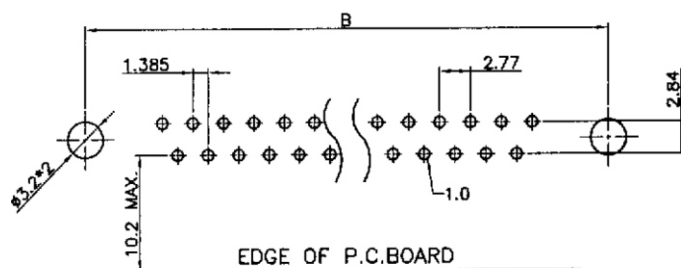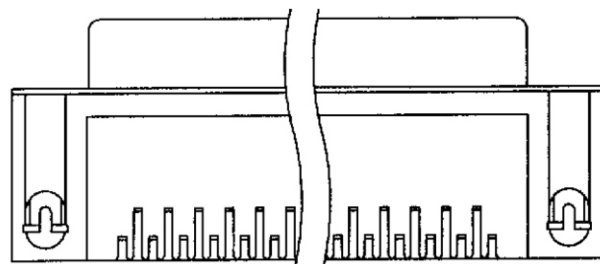

RECOMMENDED P.C.B LAYOUT (TOP VIEW)
TOLERANCES: $\pm 0.05\text{mm}$

PARTS DIMENSION TABLE



parts no.	DIM. a	DIM. b	inner thread
B	4.8	11.8	4#40
D	5.8	12.0	4#40
F	4.8	11.8	M3
W	4.8	11.8	M2.6
Y	5.8	12.0	M2.6

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
X, $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

DRM-SGNH-xx-LF
SERIES | | | LEADFREE
| | | 09~37 WAY
| | | HEX SCREW
| | | NUT
| | | FULL GOLD
| | | FEMALE

DESCRIPTION: D-SUB 0.409"(10.40mm) FOOTPRING, RIGHT ANGLE