
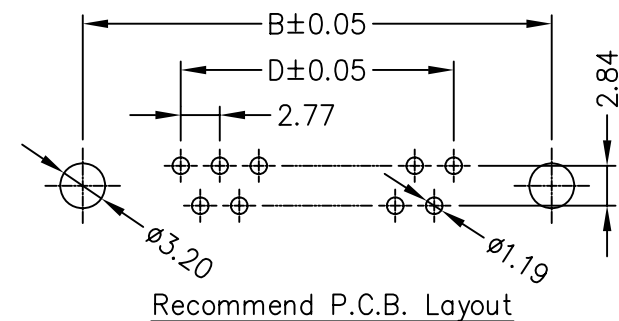
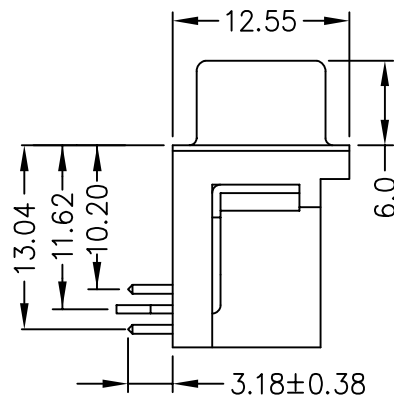
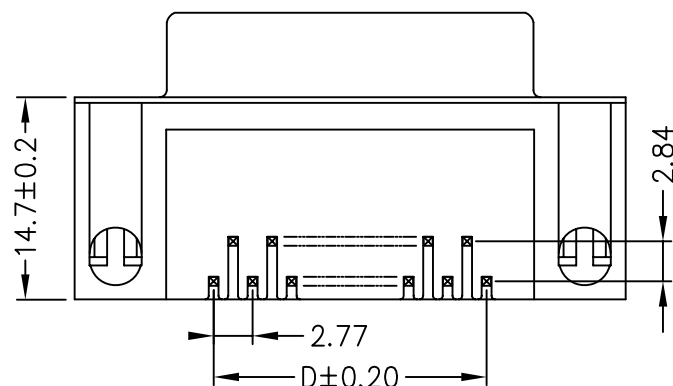


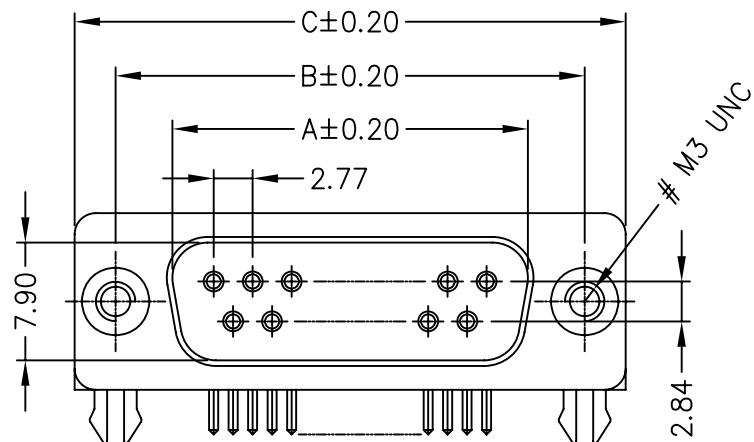

Material:

1. Insulator: PBT+30% Glass Fiber(Meet UL94V-0).
2. Contact: Copper Alloy.
3. Contact Plated: Selective Gold over Nickel Plated.
4. Shell: Steel with Nickel or Tin or Zinc Plated.

Specification:

1. Current Rating: 5 Amps.
2. Withstanding Voltage: AC 500V for 1 Minute.
3. Insulation Resistance: 1000M Ω Min. at DC 500V.
4. Contact Resistance: 15m Ω Max..
5. Operating Temperature: -40°C~+105°C.

No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D
DRM-SGNM3-09	16.33	24.99	30.81	11.08
DRM-SGNM3-15	24.66	33.32	39.14	19.39
DRM-SGNM3-25	38.38	47.04	53.04	33.24
DRM-SGNM3-37	54.84	63.50	69.32	49.86

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

DRM-SGNM3-xx-LF
SERIES | | | LEADFREE
09~37 WAY
M3#
NUT
FULL GOLD
FEMALE

DESCRIPTION: D-S-ub Male Right Angle Connector Footprint 10.20mm Clinch Nut/Screw Lock Type