


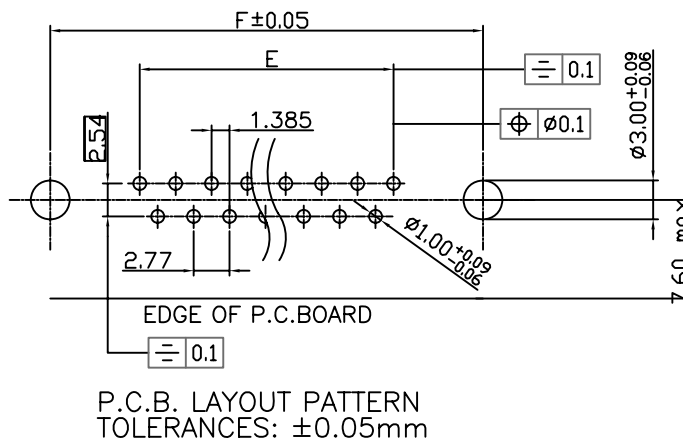

SPECIFICATION

MATERIAL

Insulator: Thermal Plastic UL94V-0

Contacts: Copper Alloy

Shell: Steel

Rivet,Boardlock: Copper Alloy

CONTACT PLATING

Underplate: 50u"~100u" Nickel

Contact Area: 1u"~30u" Selective Gold

Solder Tails Area: 100u"~200u" Tin/Lead(Brighten Tin)or

100u"~200u" Tin/Lead(Brighten Tin)or
100u"~200u" Tin/Lead Free(Brighten Tin/Matte Tin)

ELECTRICAL

Operation Voltage: 250 VAC max.

Current Rating: 3 Amps




Contact Resistance: 25 mohms

Insulation Resistance: 3000 Mohms min @ 500 VDC

Dielectric Withstanding Voltage: 1000 VAC / minute

Operating Temperature: -55°C TO +105°C

POSITION	A	B	C	E	F
09	16.35	25.00	31.0	11.08	25.00
15	24.70	33.30	39.3	19.39	33.30
25	38.40	47.04	53.1	33.24	47.04
37	54.80	63.50	69.5	49.86	63.50

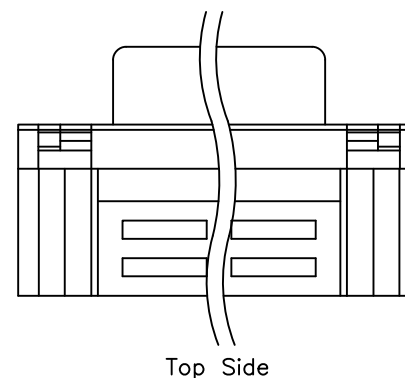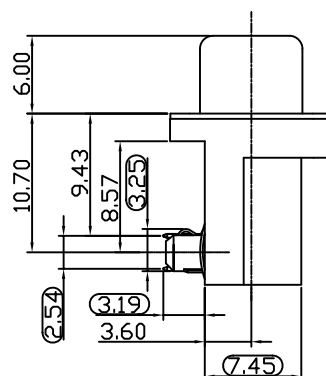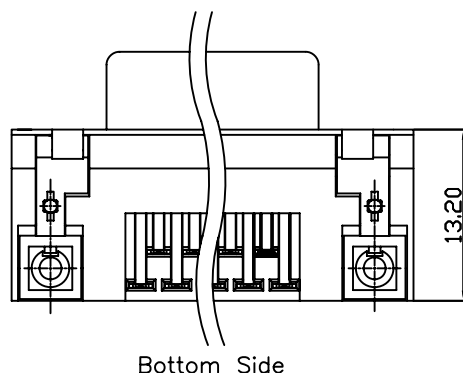

Bottom Side

Top Side

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

 $X_{\pm}$

CHECKED BY GENIUS

 $\cdot X_{\pm}$

UNIT / mm

.XXX ±

DATE _____

ANG ±

SIZE A4

PJECTION

照片框

ORDER INFORMATION

DRP-SNM3-xx-LF

SERIES M3 NUT FEMALE LEADFREE 09~37 WAY

DESCRIPTION: D-SUB 90 right angled press fit

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com