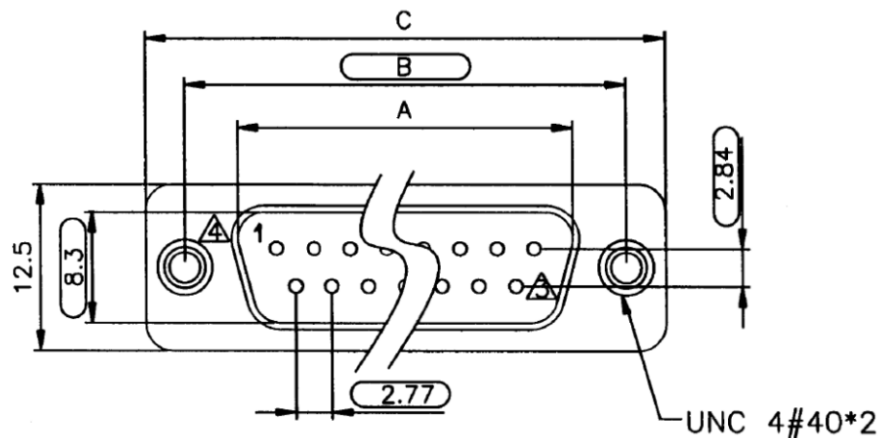


SPECIFICATION

MATERIAL

Insulator: Thermal Plastic UL94V-0

Contacts: Copper Alloy

Shell: Steel

Rivet, Boardlock: Copper Alloy

CONTACT PLATING

Underplate: 50u"~150u" Nickel

Contact Area: 1u"~50u" Selective Gold

Solder Tails Area: 100u"~300u" Tin(Lead Free)

ELECTRICAL

Operation Voltage: 250 VAC Max.

Current Rating: 3 Amps Max.

Contact Resistance: 15 mohms Max.

Insulation Resistance: 3000 Mohms Min. @ 500 VDC

Dielectric Withstanding Voltage: 1000 VAC / minute

Temperature Range: -55°C To +105°C

POSITION	A	B	C	D
9	16.92	25.00	30.8	19.2
15	25.25	33.30	39.2	27.7
19	30.60	38.86	44.8	32.8
23	35.90	44.30	50.3	38.3
25	38.96	47.10	53.1	41.1
37	55.42	63.50	69.4	57.3

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DS-PGN-xx-LF
SERIES NUT
LEADFREE
09~37 WAY
GOLD
MALE

DESCRIPTION: MINI USB-5PIN(F) B TYPE 180° DIP