
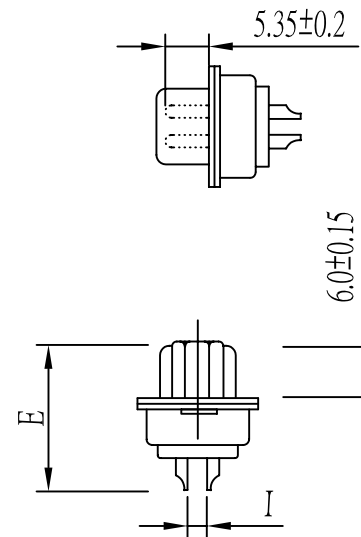


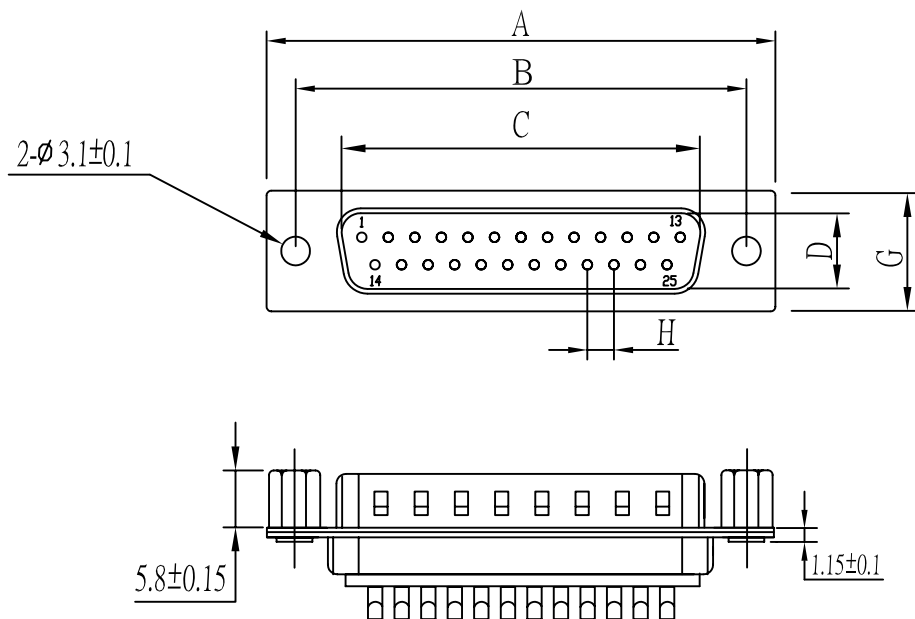

#### Note:

##### 1.Material:

- 1.1 Insulator: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: Copper alloy,t=0.20mm
- 1.3 Shell: Spcc,t=0.30mm

##### 2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 750 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min.
- 2.5 Total mating force: 7.0 Kg Max.
- 2.6 Total unmating force: 1.5 Kg Min.
- 2.7 Temperature range: -55°C~85°C

| PART NO  | A±0.25 | B±0.20 | C±0.20 | D±0.20 | E±0.30 | F±0.25 | G±0.25 | H±0.05 | I±0.10 | J±0.25 | K±0.25 |
|----------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| DS-PJ-09 | 30.81  | 24.99  | 16.92  | 8.38   | 15.30  |        | 12.55  | 2.77   | 2.84   |        |        |
| DS-PJ-15 | 39.25  | 33.32  | 25.25  | 8.38   | 15.30  |        | 12.55  | 2.77   | 2.84   |        |        |
| DS-PJ-25 | 53.04  | 47.04  | 38.96  | 8.38   | 15.30  |        | 12.55  | 2.77   | 2.84   |        |        |
| DS-PJ-37 | 69.50  | 63.50  | 55.42  | 8.38   | 15.30  |        | 12.55  | 2.77   | 2.84   |        |        |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ± 0.10  
ANG ±

PPOJECTION

照片框

#### ORDER INFORMATION

DS-PJ-xx-LF  
SERIES LEADFREE  
09~37 WAY  
JACKSCREW  
MALE

DESCRIPTION: D-SUB SOLDER 鉚前型 (不通孔)