



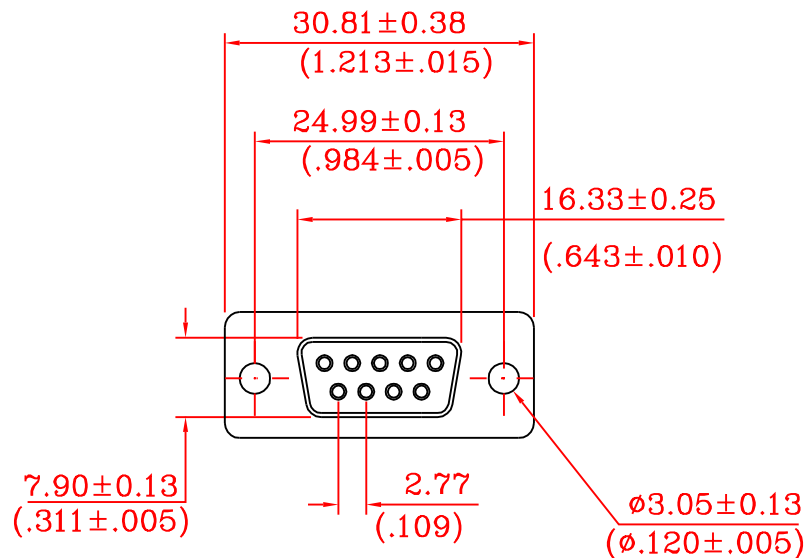


MATERIALS AND FINISH

SHELL : STEEL MATERIAL, FRONT SHELL TIN
FINISHED AND BACK SHELL TIN FINISHED
INSULATOR : PBT THERMOPLASTIC, 30% GLASS
FILLED, UL 94V-0 RATED
CONTACT MATERIAL : BRASS
CONTACT FINISH : SELECTIVE GOLD FINISHED

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 5.0 AMPS
CONTACT RESISTANCE : 30 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
TEMPERATURE RATING : -55 C ~ +105 C

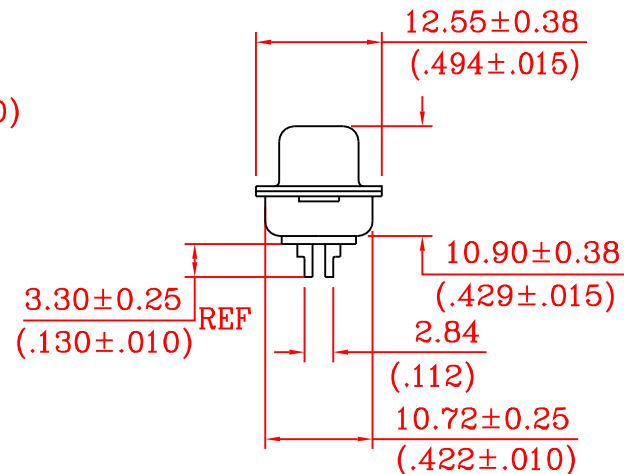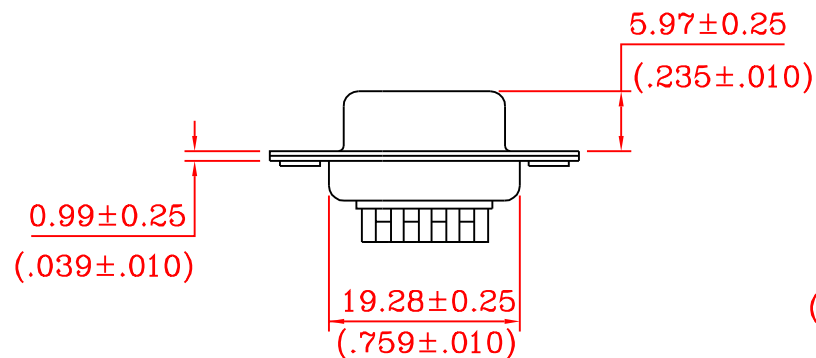

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DS-SS-09-LF
SERIES T LEADFREE
09 WAY
SOLDER
FEMALE

DESCRIPTION: D-SUB 9S SOLDER TYPE