




DSC-PGxxxx-09-LF
LEADFREE

RoHSCompliant

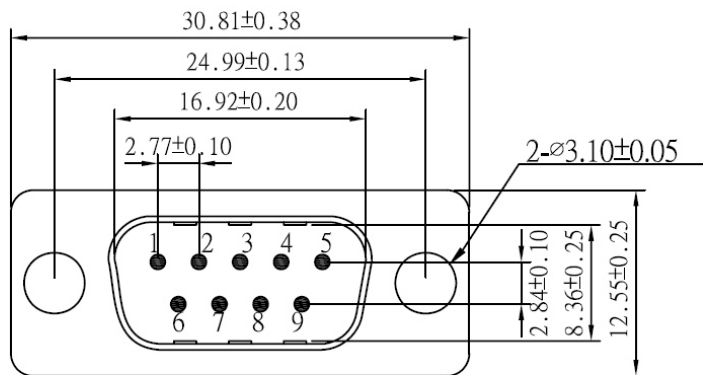

A	180pf± 20%
B	470pf± 20%
C	820pf± 20%
D	1000pf± 20%
E	2200pf± 20%
F	5600pf± 20%

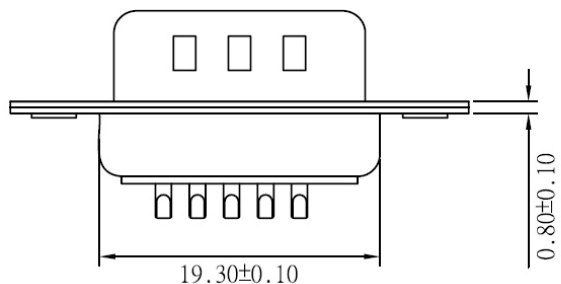

SPECIFICATION

PIN CONTACT: Brass , Gold plated over nickel
 INSULATOR: PBT & Glass-fibre reinforced UL 94 V0
 SHELL: Tin plated shell
 CONTACT PLATING:1-1.5u" Gold plated over nickel
 CURRENT RATING: 5 AMP
 WORKING VOLTAGE: 50V DC max
 DIELECTRIC STRENGTH:1000V AC for one minute
 (only pin to pin)
 INSULATOR RESISTANCE:1000MΩ min at 500V DC
 (only pin to pin)
 TEMPERATURE: -55℃ ~ +105℃



PART NO. DSC-PG-xxxx-09		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:			
DWG NO. DSC-PG-xxxx-09							
FILE NO.		DRAWING BY	PROJECTION	AREA	REVISIONS	HK	DATE
UNIT / mm	SCALE 1:1						

煜倫股份有限公司