


A	180pf± 20%
B	470pf± 20%
C	820pf± 20%
D	1000pf± 20%
E	2200pf± 20%
F	5600pf± 20%

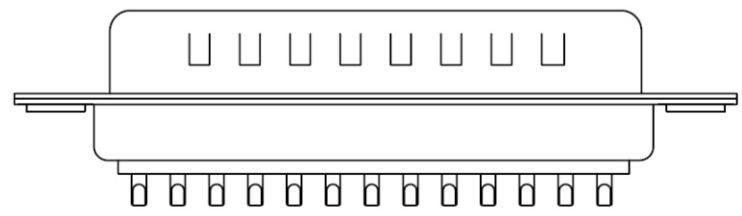

SPECIFICATION

PIN CONTACT: Brass,Gold plated over nickel  
 INSULATOR:PBT & Glass-fibre reinforced UL 94 V-0  
 SHELL: Tin plated shell  
 CURRENT RATING: 5 AMP  
 WORKING VOLTAGE: 50V DC max  
 DIELECTRIC STRENGTH: 1000V AC for one minute(only pin to pin)  
 INSULATOR RESISTANCE: 1000MΩ min at 500V DC(only pin to pin)  
 TEMPERATURE: -55°C— +105° C

**DSC-PGxxxx-25-LF**  
 180:180PF LEADFREE  
 5600:5600PF

**RoHS Compliant**



PART NO. <b>DSC-PGxxxx-25</b>	
DWG NO. <b>DSC-PGxxxx-25</b>	
FILE NO.	
UNIT / mm	SCALE 1:1

CHECKED BY CY	DRAWING BY
DRAWING BY	
PROJECTION	

TOLERANCES ARE
.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIP TION:				
AREA	REVISIONS	HK	DATE	

煜倫股份有限公司