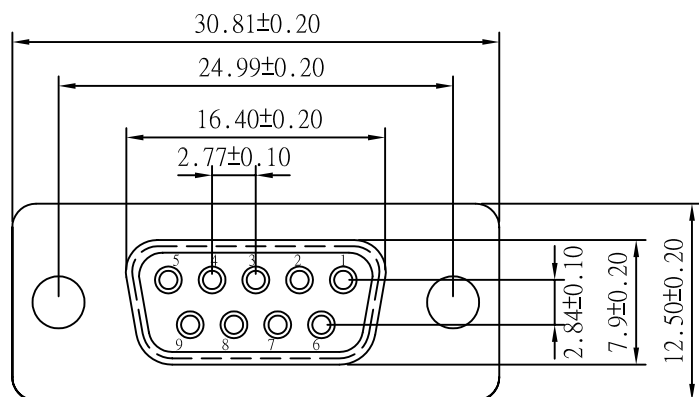


A	180pf± 20%
B	470pf± 20%
C	820pf± 20%
D	1000pf± 20%
E	2200pf± 20%
F	5600pf± 20%

SPECIFICATION

PIN CONTACT: Brass , Gold plated over nickel

INSULATOR: PBT & Glass-fibre reinforced UL 94 VO

SHELL: Tin plated shell

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.15
.XXX ± 0.05
ANG ±

PPOJECTION

ORDER INFORMATION

DSC-SGxxxx-09-LF
SERIES T LEADFREE
09 WAY
FEMALE 0180:180pf
GOLD 0470:470pf
5600:5600pf

DESCRIPTION: