


Specifications

- Current Rating :3 Amps
- Insulator Resistance :5000 Megohms min.
- Dielectric Withstanding :AC 1000 V
- Operating Temperature :-40 °C ~ +105 ° C
- Contact Material :Copper Alloy
- Insulator Material :Polyester,UL 94V-0
- Standard :Nylon-6T color black
- Max Processing Temp :The housing will withstand exposure to 260° C±5° C solder bath temperature for 5 seconds in a wave solder application with a 1.6mm MIN thick circuit board.
- Mini push-out :force terminal in both directions 1KG.

Finish: Tin,Gold or Duplex Plated

Standard: Gold Flash all over

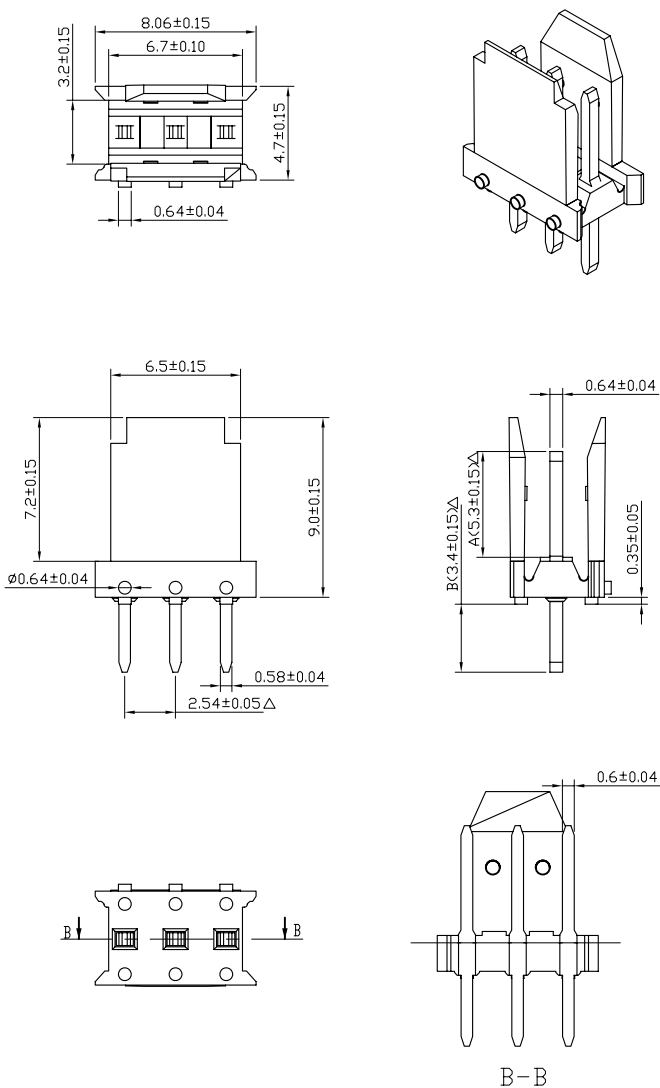

P.C.B Hole layout



煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

照片框

ORDER INFORMATION

DUB-Dx-1X03-LF

SERIES

LEADFREE

03 WAY

T:TIN

S30:SEMI GOLD 30u"

DIP 180°

DESCRIPTION: