


Specifications:

Current Rating:3.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:20m Ohm.Max
 Insulation Resistance:1,000M Ohm.Min.
 Withstanding Voltage:1,000V AC/Minute
 Operating Temperature Range:-40°C To +85°C
 Material and Finish:
 Insulator:Nylon 66 (UL94V-0)
 Insulator Color:Black
 Contact:Brass
 Plating:Gold Plated 1u”

Dimension:

Circuits	Dimension:		Circuits	Dimension:	
	A	B		A	B
04	7.62	9.98	24	58.42	60.78
06	12.70	15.06	26	63.50	65.86
08	17.78	20.14	28	68.58	70.94
10	22.86	25.22	30	73.66	76.02
12	27.94	30.30	32	78.74	81.10
14	33.02	35.38	34	83.82	86.18
16	38.10	40.46	36	88.90	91.26
18	43.18	45.54	38	93.98	96.34
20	48.26	50.62	40	99.06	101.42
22	53.34	55.70			

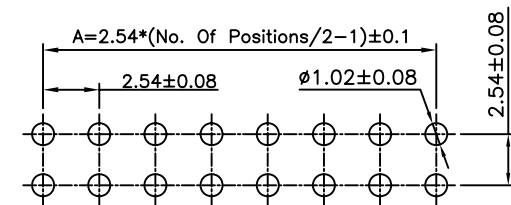

PCB Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PJECTION

照片框

ORDER INFORMATION

DUB-RG-2Xxx-LF
 SERIES | LEADFREE
 2X02:04 WAY
 2X20:40 WAY
 GOLD
 DIP 90°

DESCRIPTION: 2.54mm Wire To Board Wafer Double Row