
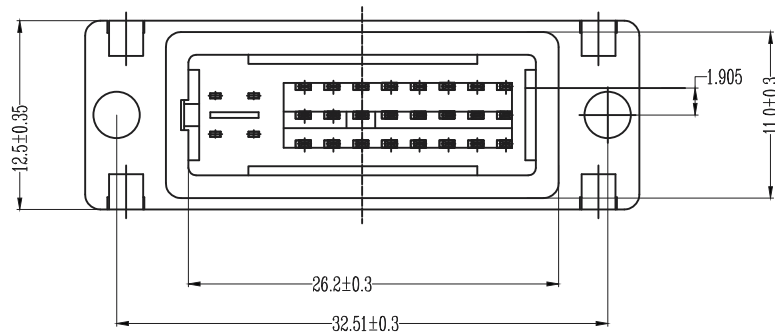
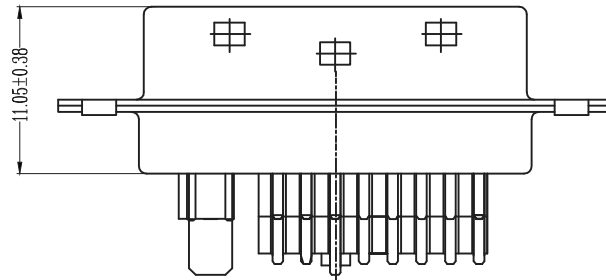


PIN#14(SEE NOTE 1)



UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3

NOTE:

1:CONTACT HEIGHT FOR PIN#14 IS TO BE <4.70>.
OTHER CONTACT HEIGHT (5.46).

2:ELECTRICAL

RATED:1.5A 40V (AC)

CONTACT RESISTANCE:25mΩ MAXIMUM.

INSULATION RESISTANCE:1000MΩ MINIMUM.

DIELECTRIC WITHSTANDING VOLTAGE:500V

3:MECHANICAL

MATING FORCE:4.5KG MAX.

UNMATING FORCE:4KG MAX.

UNMATING FORCE:1KG MIN.

4: MATERIAL:

PLASTIC CORE:PBT 加纖 顏色: 黑/白

SHELL: SPCC T=0.4 前鍍後錫

TERMINAL:C2680-H T=0.4 鍍前金(0.8U"min)後錫

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

P PROJECTION

照片框

ORDER INFORMATION

DVI-PS-24+5-LF
SERIES | LEADFREE
24+5 PIN
SOLDER
MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: DVI 24+5 公頭 焊線式