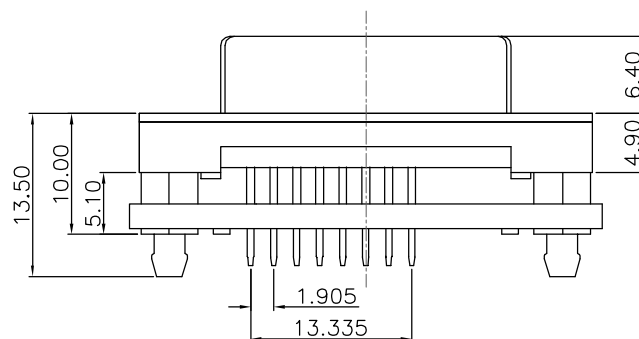
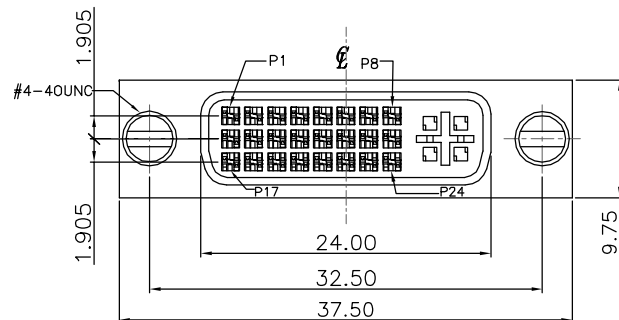


RECOMMENDED PCB LAYOUT

NOTE
 MATERIAL
 BODY&LATCH: NY66 RATED.
 NUMERAL CONTACTS: PHOSPHOR BRONZE
 SHELL:ZINC ALLOY
 RIVET:BRASS
 CONTACT PLATING: GOLD/TIN PLATING OVER NICKEL
 ELECTRICAL SPECIFICATION
 CURRENT RATING: 1.5A;
 VOLTAGE RATING: 40V;
 CONTACT RESISTANCE: 30mΩ MAX.
 INSULATION RESISTANCE:1000MΩ MIN 500V DC.
 DIELECTRIC WITHSTANDING VOLTAGE:500V AC
 ENVIRONMENTAL
 OPERATING TEMPERATURE: -20°C~80°C.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DVI-SD100Z-24+1-LF
 SERIES CLIP 24+1WAY LEADFREE
 HIGH 10.0mm
 DIP 180°
 FEMALE

DESCRIPTION: DVI 24+1 DIP 180° FEMALE 成品(加高型 24+5膠芯)