

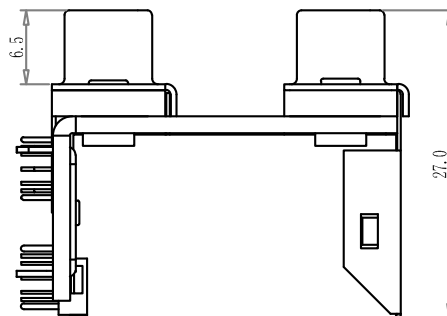
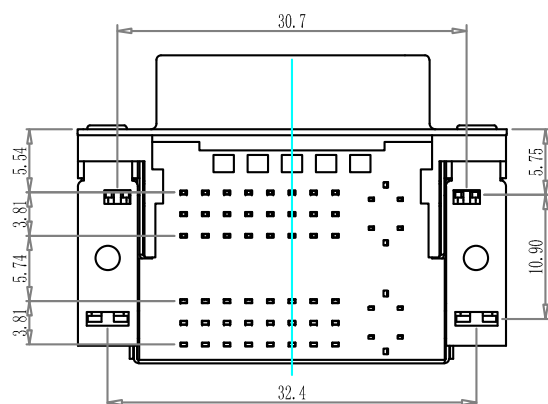
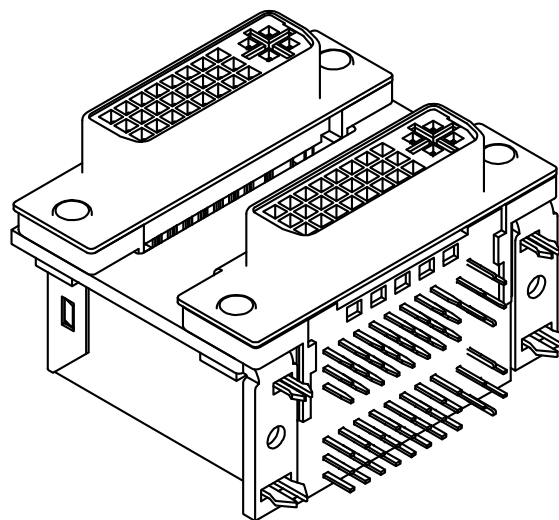


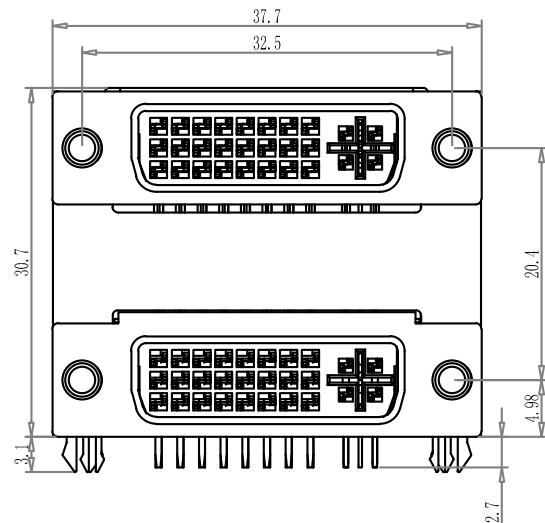

- 1). MATERIAL
INSULATOR: PBT OR HIGH TEMPERATURE PLASTIC
CONTACTS: BRASS
CONTACT PLATING: GOLD PLATING OVER NICKEL ON CONTACT AREA
TIN PLATING ON TERMINAL
- 2). MECHANICAL
MATING FORCE: 4.5 KG MAX. @ 25 MM/MINUTE
UNMATING FORCE: 1.0 KG MIN. AND 4.0 KG MAX. @ 25 MM/MINUTE
DURABILITY: 100 MATING CYCLES
- 3). ELECTRICAL SPECIFICATION
INSULATION RESISTANCE: 1000 MEGOHMS MIN
DIELECTRIC WITHSTANDING VOLTAGE: 500V DC RMS $\pm 50V$. 60HZ
CURRENT RATING: 1.5 AMPERES MIN
SHELL RESISTANCE: 50 MILLOHMS MAX. INITIAL; 50 MILLOHMS MAX. CHANGE FROM INITIAL
CONTACT RESISTANCE: UPPER PORT 35 MILLOHMS MAX.
LOWER PORT 20 MILLOHMS MAX.
- 4). ENVIRONMENTAL
OPERATING TEMPERATURE: -20° TO 85°

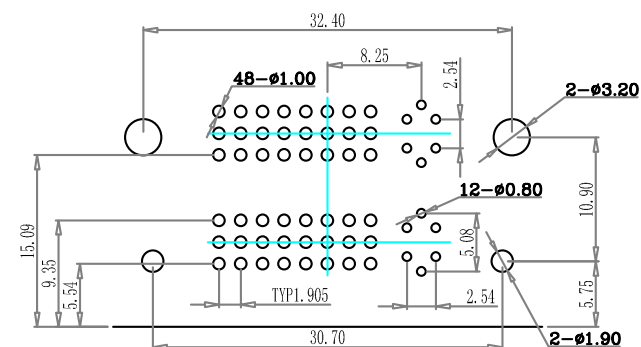

RECOMMENDED P.C.B. LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50
X. ± 0.38
.XX ± 0.25
.XXX ± 0.15
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DVIB1-FR20FN-24+5-LF

SERIES
FEMALE
DIP90°
NUT
FULL METAL
SPACING 20.4mm
LEADFREE
24+5 PIN

DESCRIPTION: