

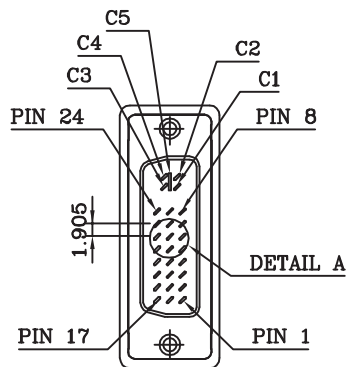



WIRE DIAGRAM

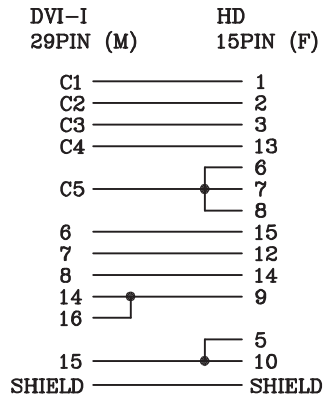


DVI 29M



DETAIL A

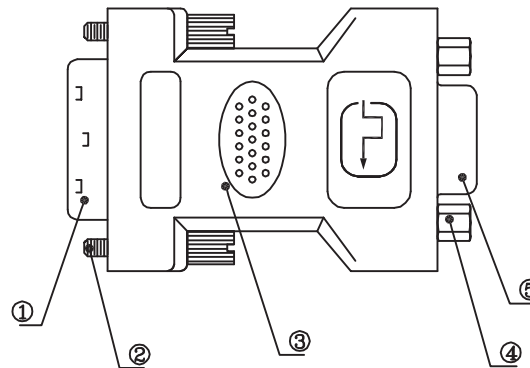

BACK SIDE



15F

- 100% OPEN / SHORT / INSULATING TEST
- INSULATION TEST: 5MΩ

COMPONENTS	DESCRIPTION	Q'TY
1 DVI29M	DVI-I 29P Male Connector Insulator: High Temperature Plastic UL-94V-0 Contact: Brass Shell: Steel With Tin Plated 150μ" Over Contact Plating: Gold On Contact Area And Tin/LEAD On Solder Cup All With Nickel Underplating	1
2 Jack Screw	UNC #4-40 Nickel Plated	2
3 Hood HI	P.V.C Molded Color: Beige Inner Molded With Copper Foil Shielded	1
4 Screw Lock	UNC #4-40 Nickel Plated	2
5 D15F	D-SUB High Density 2.29mm 15P Female Connector Shell: Steel Nickel Plated Insulator: Black P.B.T Contact: Brass G/F Gold Plated	1

DVIHD-EMBG-2915-LF  
LEADFREE

RoHS Compliant

2		
1	2002.12.17	修改 15F膠芯為黑色
NO.	DATE	MODIFICATION

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

煜倫股份有限公司

PART NO. DVIHD-EMBG-2915

DWG NO. DVIHD-EMBG-2915

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

- .X ± 0.2
- .XX ±
- .XXX ±
- AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE