
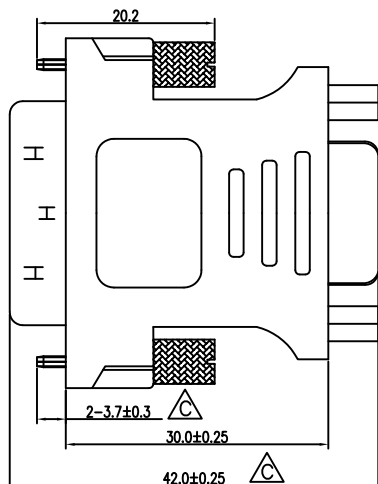


PIN ASSIGNMENT:

DVI-M	COLOR	HD15-F	
C1	BLACK	1	
C2	BLACK	2	
C3	BLACK	3	
C4	BLACK	13	
C5	WHITE	6	
		7	G2
		8	
6	BLACK	15	
7	BLACK	12	
8	BLACK	14	
14	BLACK	9	
15	BLACK	5	G3
		10	
16	BLACK		
SHELL	COPPER	SHELL	



ELECTRICAL CHARACTER:

- 100% OPEN&SHORT TESTING
- INSULATION RESISTANCE:10M Ohms(MIN) DC 300V AT 10ms
- CONDUCTIVE RESISTANCE:1 Ohms(MAX)
- THIS CABLE HAS TO CONFORM RoHS REGULATION
- "△" "NEED TO CHECK CAREFULLY BY QC"
- "G\*" "EXPRESSION CONNECT SHORT"

序號 NO.	零件料號 PART NO.	零件名稱 PART NAME	用量 Q'TY	零件規格 SPEC DESCRIPTION
J	BAG		1	PE BAG L80*W60*±0.05 WITH RED ENVIRONMENTAL PROTECTION MARK
I	DUSTCAP		1	DUSTCAP OF DVI
H	SCREW		2	THUMB SCREW: #4-40
G	P.V.C		1	MOLDING PVC COLOR:WHITE 45P
F	PE		1	LOW DENSITY PE
E	COPPER		1	COPPER L80*W25
D	WIRE		1	UL 1007 26AWG WHITE L=25mm
C	WIRE		10	UL 1007 28AWG BLACK L=25mm
B	CONNECTOR		1	HD-SUB 15PIN FEMALE CONNECTOR:G/F INSULATOR COLOR: BLUE SHELL: NICKEL PLATED, WITH HEX NUT #4-40.
A	CONNECTOR		1	DVI(12+5) MALE CONNECTOR:G/F INSULATOR COLOR: WHITE SHELL: NICKEL PLATED

DVIHD-EMBK-1715-LF  
LEADFREE

RoHS Compliant

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

煜倫股份有限公司

PART NO. DVIHD-EMBK-1715

DWG NO. DVIHD-EMBK-1715

FILE NO.

UNIT / mm

SCALE 1:1


CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2  
.XX ±  
.XXX ±  
AWG



DESCRIPTION:

DVI(12+5)/M TO HD15/F ADAPTER NO LOGO

AREA

REVISIONS

HK

DATE