


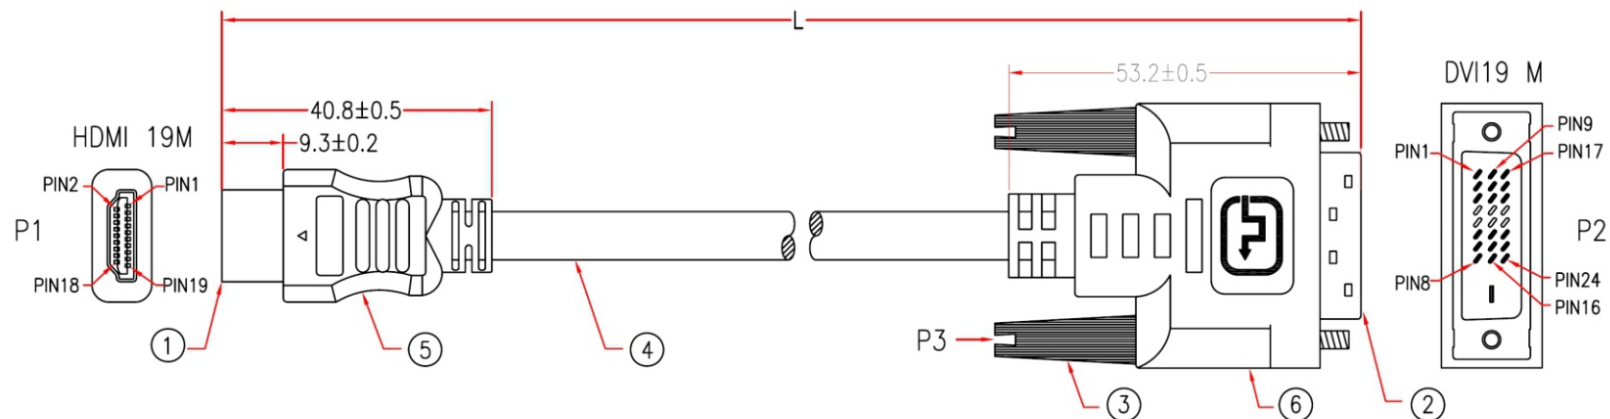

*NOTE: All relevant materials are complied with RoHS directive .

P1		P2	
1	2	RED	
3	1	WHITE	
2	3	SHIELD	
4	10	GREEN	
6	9	WHITE	
5	11	SHIELD	
7	18	BLUE	
9	17	WHITE	
8	19	SHIELD	
10	23	BROWN	
12	24	WHITE	
11	22	SHIELD	
15	6	VIOLET	
16	7	RED	
17	15	ORANGE	
18	14	YELLOW	
19	16	WHITE	
SHIELD	SHIELD		

6	UL1061 26AWG INSULATOR WIRE, LENGTH 28mm, DRAWING No. EH002601C-013	1	M304
	BLACK HEAT SHRINK TUBE $\phi 1.0 \times 8\text{mm}$	17	M743
	BLACK HEAT SHRINK TUBE $\phi 3.0 \times 6\text{mm}$	4	M743
	BLACK HEAT SHRINK TUBE $\phi 0.8 \times 10\text{mm}$	4	M743
	COPPER FOIL 33*90mm	1	M309
	MOLDED PE COLOR TRANSPARENT		TWN
5	MOLDED PVC BLACK		M304
	BLACK PVC TUBE $\phi 3.0 \times 6\text{mm}$	4	M304
	BLACK PVC TUBE $\phi 0.8 \times 10\text{mm}$	4	M304
	COPPER FOIL 15*60mm	1	M309
	MOLDED PE COLOR TRANSPARENT		TWN
4	MOLDED PVC BLACK		M304
	UL20276 [(28AWG*1Pair+D+FAM)*4Pcs+(28AWG*1Pair)+(28AWG*3C)]+AM+B	L-10mm	M2
3	DVI CABLE, OD 7.3mm, JACKET BLACK		
3	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BLACK	2	M95
2	DVI19 MALE, GOLD FLASH ON CONTACTS, BLACK INSULATOR	1	M83
1	HDMI 19 MALE, GOLD FLASH ON CONTACTS, BLACK INSULATOR	1	M83
No.	DESCRIPTION	Q'TY	Supplier

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG, $\pm$

照片框

ORDER INFORMATION

DVIHDMI-191928-Mxx-LF

SERIES

LEADFREE

2M:2000mm

3M:3000mm

MALE TO MALE

28 AWG

19 TO 19 WAY

DESCRIPTION: