


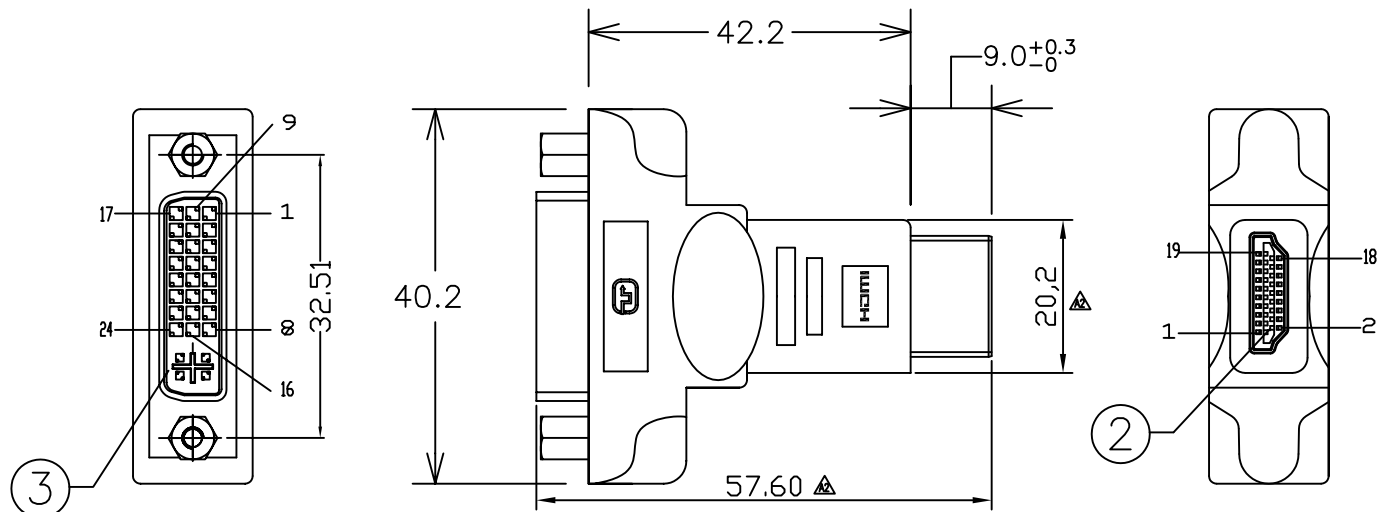

接線表

DVI(24+5)F HDMI 19M

1	3
2	1
3	2
9	6
10	4
11	5
17	9
18	7
19	8
24	12
23	10
22	11
6	15
7	16
14	18
15	17
16	19

鐵殼 鐵殼

Specification:

1. 100% OPER SHORT AND MISS WIRE TESTS.
2. Insulation Resistance: DC300V, 20MΩ
3. Contact Resistance: 2 Ω MAX

5	內模	5.8g	A0005G01*	LD-PE
4	外模	14.5g	A0P45301*	PVC 45P BLACK
3	CONN	1PCS	3JS29S-40E-AA*	DVI(24+5)/F 端子鍍金G/F, 絕緣體白色, 鐵殼鍍鎳.
2	CONN	1PCS	51S019P-30N4-E1*	HDMI 19P/M 端子鍍金G/F, 絕緣體黑色, 銅殼鍍鎳.
1	CABLE	30mm	ETAM017201*	UL2651 28AWG FLAT CABLE GRAY
序號 NO.	部品名稱 DESCRIPTION	用量 QTY.	料號 PART NO.	材質 MATERIAL

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DVIHDMI-AMBK-2919-LF

SERIES

LEADFREE

29 TO 19 WAY

BLACK
MOLDING
FEMALE TO MALE

DESCRIPTION: HDMI TO DVI 轉接頭