


1 2 3 4 5 6 7 8 9 0

J  
I  
H  
G  
F  
E  
D  
C  
B  
A


1800±50mm

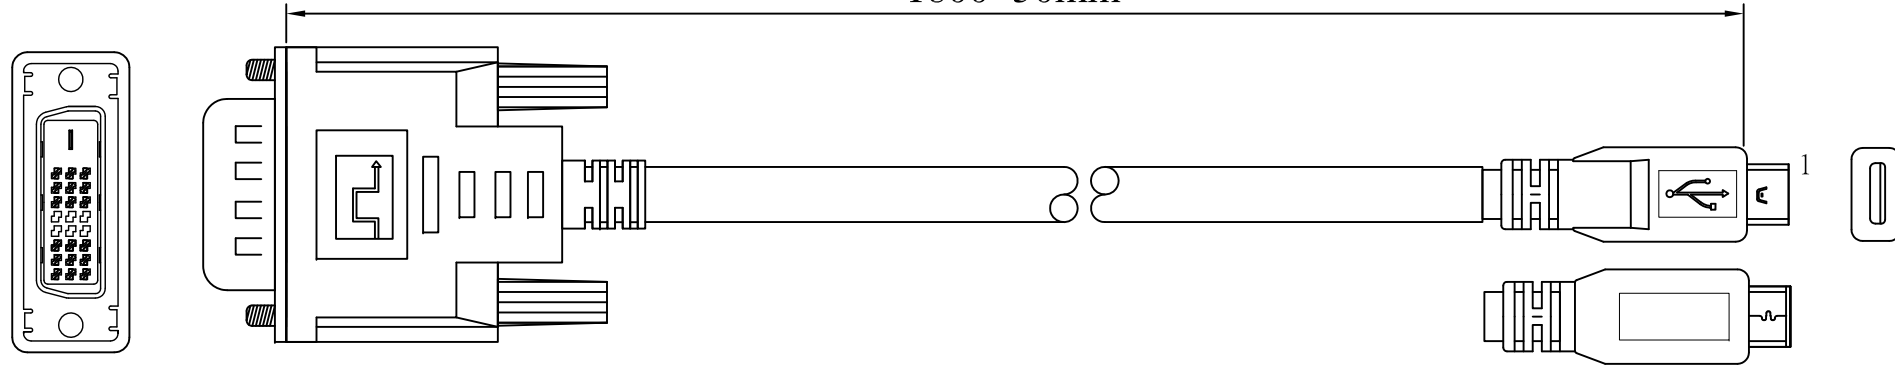

P1 DVI 24+1 MALE

P2 MINI USB 16P MALE

WIRING DIAGRAM

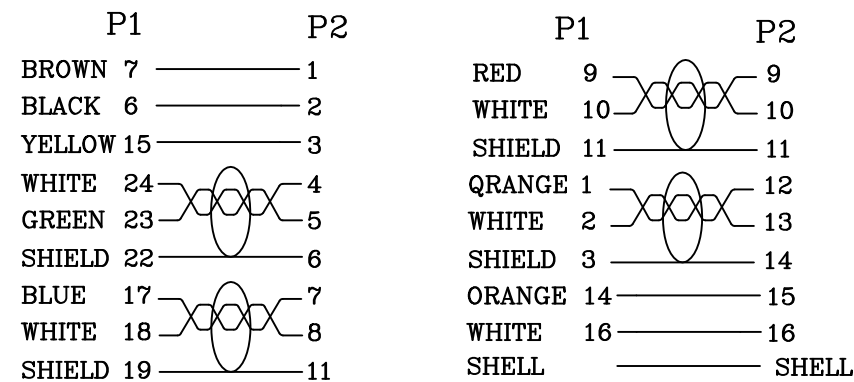

DVIMB-2416-M1M8-LF  
LEADFREE  
RoHS Compliant

5	PVC	16	G	OVERMOLD:PVC 45P #BLACK UL94V-0
4	PE	5	G	INNERMOLD:PE LOW DENSITY
3	CONNECTOR	1	PCS	DVI MALE
2	CONNECTOR	1	PCS	MINI USB 16P MALE G/OVER
1	CABLE	1/2	PCS	UL20276{[28AWG(7/0.12TS)*1P+AE+MY]*4C +28AWG(7/0.12TS)*5C}{+AL+D(7/0.12TS)+B (96/0.12AL)OD:6.5mm #BLACK L:3600mm
NO.	PART NO.	Q'TY	UNITS	DESCRIPTION

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

煜倫股份有限公司

PART NO. DVIMB-2416-M1M8		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG
DWG NO. DVIMB-2416-M1M8			
FILE NO.		DRAWING BY	PROJECTION
UNIT / mm	SCALE 1:1		

DESCRIPTION:	DVI 24P+1 M/MINI USB 16P M L:1.8M BLACK			
AREA	REVISIONS	HK	DATE	