


### WIRING DIAGRAM

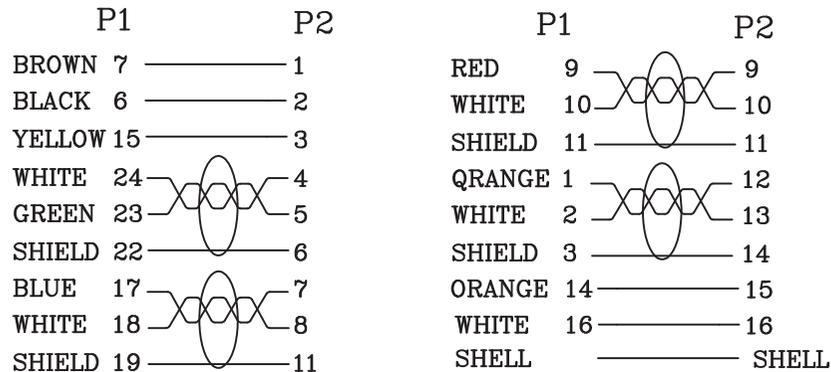

6	SCREW	2	PCS	DVI SCREW
5	PVC	18	G	OVERMOLD:PVC 45P #BLACK UL94V-0
4	PE	5	G	INNERMOLD:PE LOW DENSITY
3	CONNECTOR	1	PCS	DVI MALE
2	CONNECTOR	1	PCS	MINI USB 16P MALE G/OVER
1	CABLE	1/2	PCS	UL20276{[28AWG(7/0.12TS)*1P+AE+MY]*4C +28AWG(7/0.12TS)*5C}+AL+D(7/0.12TS)+B (96/0.12AL)OD:6.5mm #BLACK L:3600mm
NO.	PART NO.	Q'TY	UNITS	DESCRIPTION

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1

.XX±

DATE

.XXX±

ANG±

SIZE A4

PPOJECTION



ORDER INFORMATION

DVIMB-2516MS28-M1M8-LF

SERIES

LEADFREE  
1800mm  
MALE TO MALE  
28 AWG  
MALE SCREW  
25 TO 16 PIN

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: