



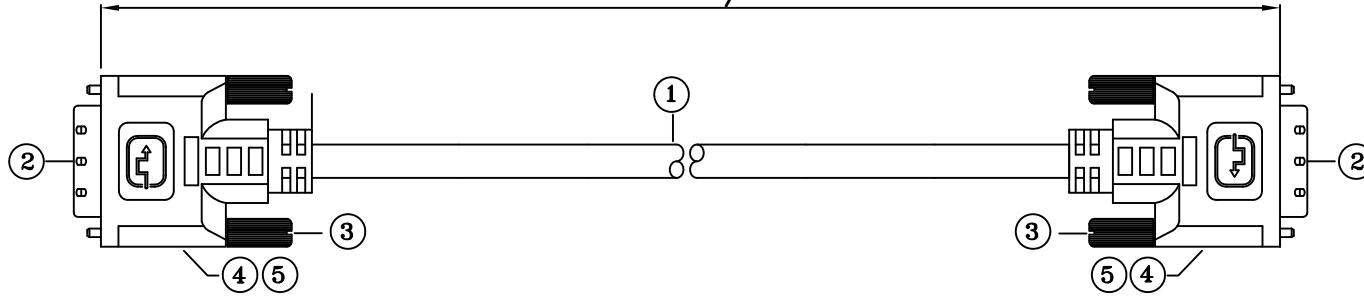




2380+30/-10



BACK SIDE



BACK SIDE

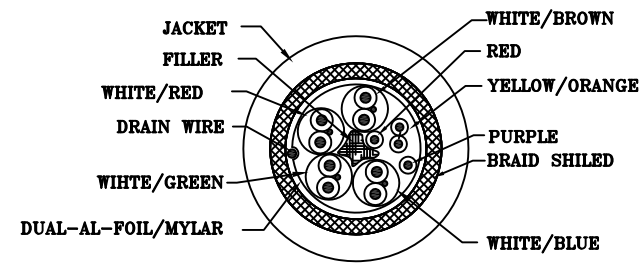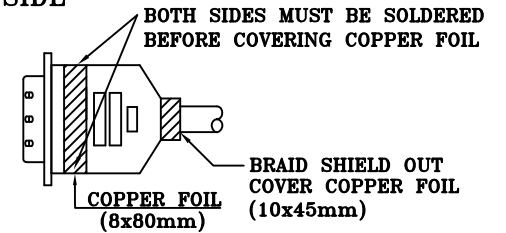

CABLE SECTION

5	OUTER EMI METAL CAN: TIN-PLATED, THICKNESS: 0.4T. INNER EMI METAL CAN: TIN-PLATED, THICKNESS: 0.4T.
4	PLASTIC HOOD COLOR FOR SNOW WHITE(JVE-79), ASSEMBLY TYPE.
3	THUMB SCREW: #4-40UNC MOLDED SNOW WHITE(JVE-79).
2	DVI-D CONN:(18+1)PIN SOLDER TYPE MALE,CONTACT:BRASS,AU FLASH, INSULATOR: PBT BLACK
1	CABLE: UL20276 (30AWGx1P+EA)x4+30AWGx1P+28AWGx3C+AB. PVC JACKET COLOR FOR GRAY OD=ø6.0±0.1mm
NO.	NOTES:

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY	CY	X. ±
CHECKED BY	GENIUS	.X ±
UNIT / mm	SCALE 1 : 1	.XX ±
DATE		.XXX ±
SIZE A4	PJECTION	ANG ±



ORDER INFORMATION


DVIX2-19192830-M2M38-LF
SERIES | LEADFREE
2380mm
28.30 AWG
MALE TO MALE
19 TO 19 WAY

DESCRIPTION: DVI (18+1)M/M L:2380mm GRAY

NOTES:

1. PIN ASSIGNMENT

P1	SIGNAL	P2
1	XXXXXXXXXXXX	T.M.D.S Data2-
2	XXXXXXXXXXXX	T.M.D.S data2+
3		T.M.D.S Data2/4(SHIELD)
6		DDC Clock
7	XXXXXXXXXXXX	DDC Data
8		
9	XXXXXXXXXXXX	T.M.D.S Data1-
10	XXXXXXXXXXXX	T.M.D.S Data1+
11		T.M.D.S Data1/3(SHIELD)
14		+5V Power
15		+5V Return
16		Hot Plug detect
17	XXXXXXXXXXXX	T.M.D.S Data0-
18	XXXXXXXXXXXX	T.M.D.S Data0+
19		T.M.D.S Data0/5(SHIELD)
22		T.M.D.S Clock(SHIELD)
23	XXXXXXXXXXXX	T.M.D.S Clock+
24	XXXXXXXXXXXX	T.M.D.S Clock-
Shield Shell	GROUND SHIELDING BRAID WIRE	Shield Shell

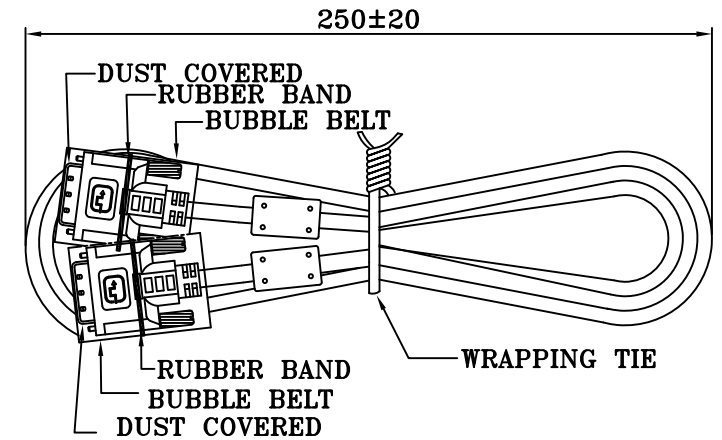

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1

.XX±

DATE

.XXX±

ANG±

SIZE A4

PJECTION

照片框

ORDER INFORMATION

DVIX2-19192830-M2M38-LF

SERIES

LEADFREE

2380mm

MALE TO MALE

28.30 AWG

19 TO 19 WAY

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: DVI (18+1)M/M L:2380mm GRAY