

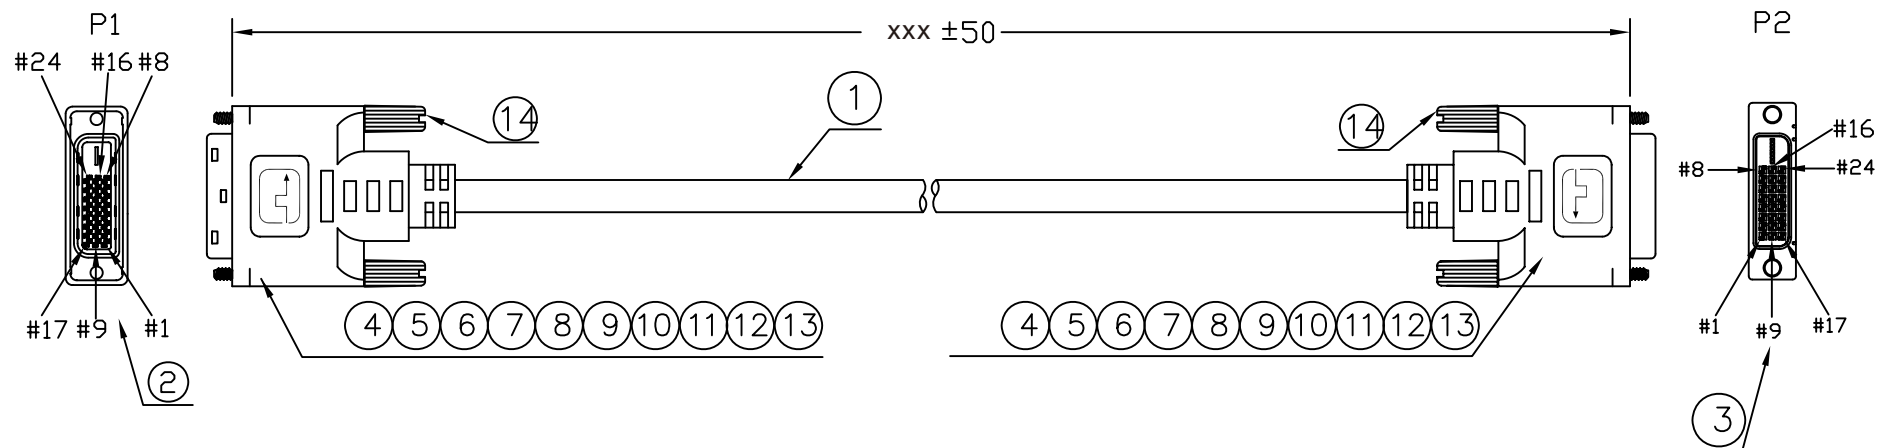




PIN ASSIGNMENT

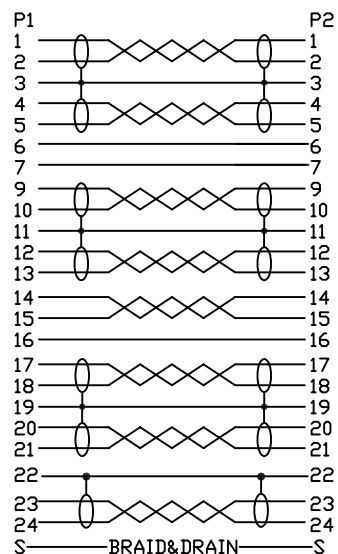

14		TIA-A/BK	120*1	MM
14		SRW-RE32/BK10	4	PCS
13		PVC-BK10/50 (低毒)	33	G
12		SOL-WIRE-FULL-TIN-1.2	3.0	G
11		FOIL-CU-30MM	65*2	MM
10		HI TEAMP TAPE:W:25MM;L:80MM	2	PCS
9		PE-5321	8.5	G
8		TUBE-HT-Ø1.0 (薄型)	5*6	MM
7		TUBE-HT-Ø1.0MM (薄型)	15*8	MM
6		TUBE-HT-Ø2.0MM (薄型)	6*14	MM
5		TUBE-HT-Ø3.0MM (薄型)	10*8	MM
4		SOL-WIRE-FULL-TIN-1.0	1.2	G
3		D.V.I-24+KEY-M(BK)	1	PCS
2		D.V.I-24+KEY-M(BK)	1	PCS
1		28-[1P+D+A+MYLAR]*7+1P+3C]+FILLER +A+D+B-BK10-7.0M-8.6U20276 (聯穎) BLACK	1	PCS
NO	PART NO.	DESCRIPTION	QTY	UNIT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DVIX2-252528-Mxxx-LF

SERIES

LEADFREE

2MF:2.5mtr

3F:3feet

MALE TO MALE

28 AWG

25 TO 25 WAY

DESCRIPTION: DVI(24+1)MALE TO MALE L:2M5 BLACK